

Long Life Fan

Cooling fan with Max. 180,000 hours of expected life.
Related product: Splash Proof Fan pp. 250, 255, 260, 268, 272

Model Numbering System

Not every combination of the following codes or characters is available. Contact us for an available combination.

9L	04	12	J	3	01
Type name	Frame size	Voltage	Speed code	Frame thickness	Sensor specifications

Fans with PWM control function

9LG	06	12	P	4	S	001
Type name	Frame size	Voltage	PWM control function	Frame thickness	Speed code	Individual customer's spec (2 to 3 digits)

Type name	9CRL	9L	9LG	etc.							
Frame size (mm)	04	06	08	09	12	14	17	57			
	40×40	60×60	80×80	92×92	120×120	140×140	Ø172	Ø172×150 (sidecut)			
Voltage (V)	12	24	48								
	12	24	48	etc.							
Speed code	E	F	G	H	J	L	M	S	etc.		
Frame thickness (mm)	0	1	3	4	5	8					
	76	38	28	25	51	80					
Sensor specifications	01, 001		02, 002		D01, D001						
	With a pulse sensor		Without a sensor		With a lock sensor						

How to Read Specifications (DC fan)

The following is a sample. See respective product pages for detailed information.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min]	Max. static pressure [Pa]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]		
9GA0412G7001	12	7 to 13.8	0.17	2.04	13100	0.36	12.7	192	0.77	42	-20 to +70	40000/60°C (70000/40°C)

Rated voltage This is the necessary voltage to drive the fan. E.g.) 12 VDC, 24 VDC, 48 VDC

Operating voltage range The voltage range over which fan operation is guaranteed.

Rated current The current when the fan is operating at rated voltage (at free air).

Rated input The power value when the fan is operating at rated voltage (at free air).

Rated speed The speed when the fan is operating at rated voltage (at free air).

Max. airflow The airflow at 0 Pa static pressure when the fan is operating at rated voltage. (Measured using the double chamber method)

Max. static pressure The static pressure at 0 m³/min airflow when the fan is operating at rated voltage. (Measured using the double chamber method)

SPL A-weighted sound pressure level (SPL) when the fan operates at the rated speed.

For the measurement method, see the Technical Materials section in the catalog.

Operating temperature The temperature range over which fan operation is guaranteed (Non-condensing).

Expected life Service life hours that 90% of bearings will survive without failing when continuously operated at the rated voltage and 60°C temperature. Expected life at 40°C is for reference only.

For more information, please refer to the technical material section.

Long Life Fan

40x40x28 mm



San Ace 40L 9L type

DC

Long Life Fan 40 mm sq.

General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-0)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire Red Black Sensor Yellow
- Mass 55 g

Specifications

The models listed below have pulse sensors.


Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9L0412J301	12	10.2 to 13.8	0.31	3.72	11700	0.52 18.4	206 0.827	48	-20 to +70	100000/60°C (135000/40°C)
9L0412H301			0.15	1.8	8400	0.37 13.1	106 0.426	40		
9L0412M301			0.045	0.54	4000	0.16 5.65	24 0.096	19		

Note: Sensor and control options are available for selection. Refer to the table on p. 612.

Airflow - Static Pressure Characteristics


9L0412J301 With pulse sensor

Operating voltage range

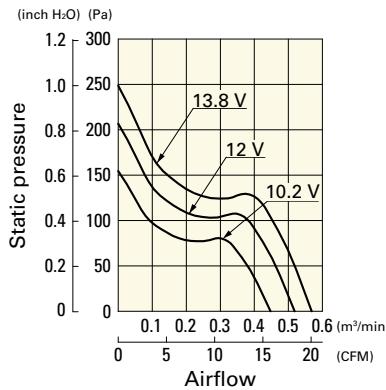


9L0412H301 With pulse sensor

Operating voltage range


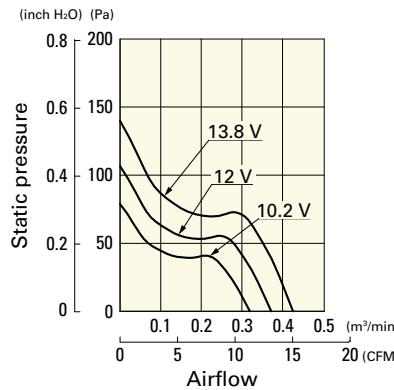


9L0412M301 With pulse sensor

Operating voltage range

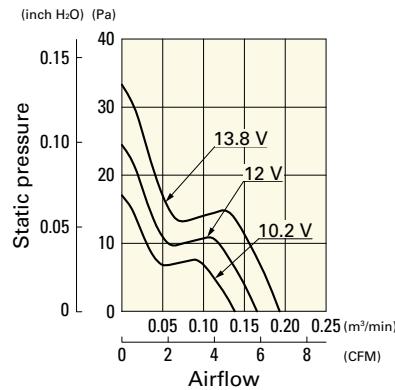


Dimensions (unit: mm)

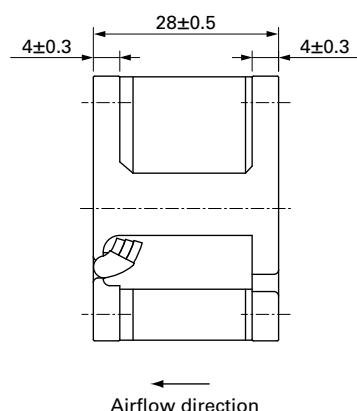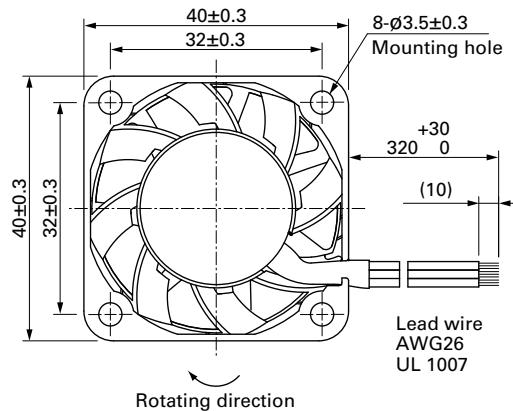

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side

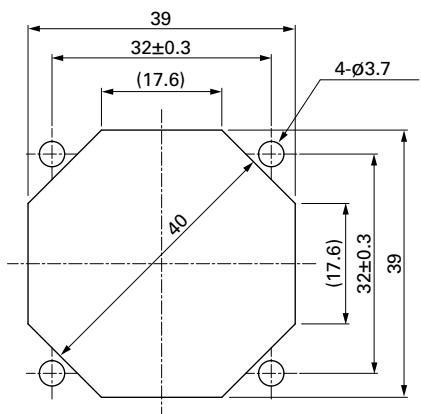

Options

Finger guards

page: p. 564

Model no.: 109-059, 109-059H

DC

Long Life Fan 40 mm sq.



60x60x25 mm

San Ace 60L 9LG type △ cULus

DC

Long Life Fan 60 mm sq.

General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire +Red -Black Sensor Yellow Control Brown
- Mass 100 g

Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
④ 9LG0612P4S001	12	10.8 to 13.2	100	0.67	8.04	11000	1.4 49.4	300 1.204	53	-20 to +70	180000/60°C (215000/40°C)
			20	0.06	0.72	2900	0.36 12.7	20.8 0.083	20		
④ 9LG0612P4J001	24	21.6 to 26.4	100	0.39	4.68	8650	1.1 38.8	182 0.73	47	-20 to +70	180000/60°C (215000/40°C)
			20	0.03	0.36	1150	0.13 4.8	3.3 0.013	14		
④ 9LG0612P4H001	12	10.8 to 13.2	100	0.17	2.04	6150	0.78 27.5	97 0.389	35	-20 to +70	180000/60°C (215000/40°C)
			20	0.03	0.36	1350	0.17 6.0	4.7 0.018	14		
④ 9LG0612P4M001	24	21.6 to 26.4	100	0.09	1.08	4200	0.53 18.7	45 0.18	24	-20 to +70	180000/60°C (215000/40°C)
			20	0.03	0.36	900	0.11 3.8	2.0 0.008	14		
④ 9LG0624P4S001	12	10.8 to 13.2	100	0.34	8.16	11000	1.4 49.4	300 1.204	53	-20 to +70	180000/60°C (215000/40°C)
			20	0.03	0.72	2900	0.36 12.7	20.8 0.083	20		
④ 9LG0624P4J001	24	21.6 to 26.4	100	0.19	4.56	8650	1.1 38.8	182 0.73	47	-20 to +70	180000/60°C (215000/40°C)
			20	0.02	0.48	2200	0.28 9.8	12.0 0.048	17		
④ 9LG0624P4H001	12	10.8 to 13.2	100	0.08	1.92	6150	0.78 27.5	97 0.389	35	-20 to +70	180000/60°C (215000/40°C)
			20	0.02	0.48	1300	0.16 5.6	4.3 0.017	14		
④ 9LG0624P4M001	24	21.6 to 26.4	100	0.04	0.96	4200	0.53 18.7	45 0.18	24	-20 to +70	180000/60°C (215000/40°C)
			20	0.01	0.24	800	0.1 3.5	1.6 0.006	14		
④ 9LG0648P4S001	48	36 to 72	100	0.18	8.64	11000	1.4 49.4	305 1.224	53	-20 to +70	180000/60°C (215000/40°C)
			20	0.02	0.96	2900	0.36 12.7	20.8 0.083	20		
④ 9LG0648P4J001	48	36 to 72	100	0.1	4.8	8650	1.1 38.8	182 0.73	47	-20 to +70	180000/60°C (215000/40°C)
			20	0.02	0.96	2100	0.26 9.1	10.7 0.042	17		
④ 9LG0648P4H001	12	10.8 to 13.2	100	0.06	2.88	6150	0.78 27.5	97 0.389	35	-20 to +70	180000/60°C (215000/40°C)
			20	0.02	0.96	1000	0.12 4.2	2.5 0.01	14		
④ 9LG0648P4M001	24	21.6 to 26.4	100	0.04	1.92	4200	0.53 18.7	45 0.18	24	-20 to +70	180000/60°C (215000/40°C)
			20	0.02	0.96	650	0.08 2.8	1.0 0.004	14		

* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.


Note 1: Sensor and control options are available for selection. Refer to the table on pp. 612 to 613.

Note 2: The ④ mark indicates Short LeadTime Service applicable models. See p. 630 for details.


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG0612P4S001 With pulse sensor with PWM control function


PWM duty cycle

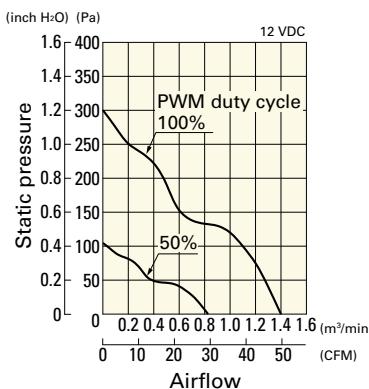

Operating voltage range

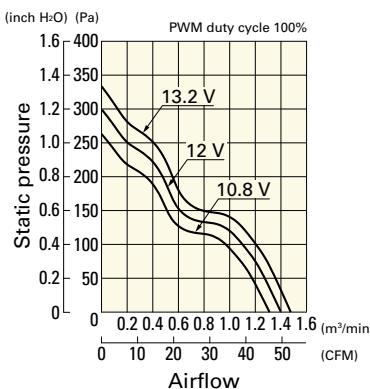


PWM duty - Speed characteristics example

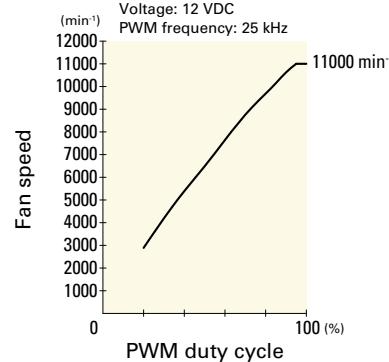


9LG0612P4J001 With pulse sensor with PWM control function


PWM duty cycle

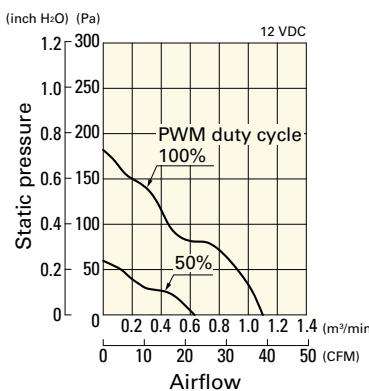

Operating voltage range

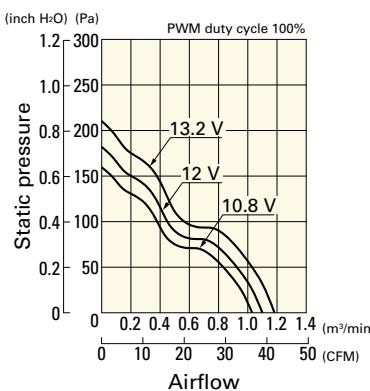


PWM duty - Speed characteristics example

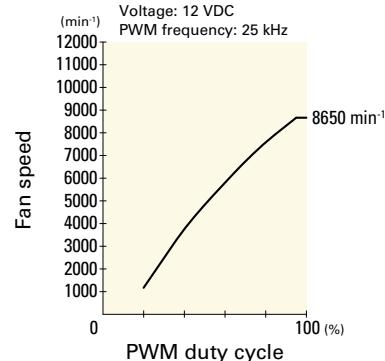


9LG0612P4H001 With pulse sensor with PWM control function


PWM duty cycle

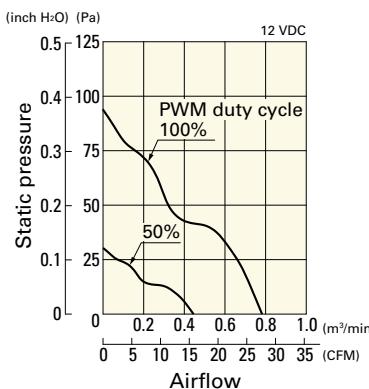

Operating voltage range

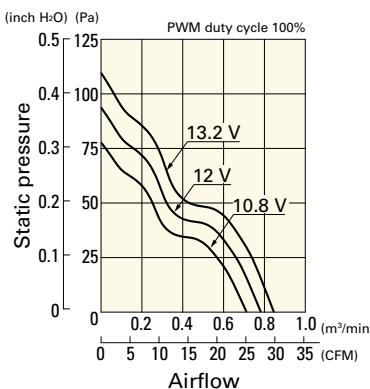


PWM duty - Speed characteristics example

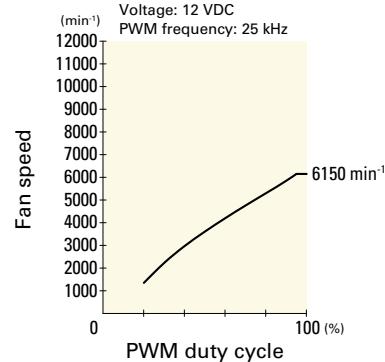


9LG0612P4M001 With pulse sensor with PWM control function


PWM duty cycle

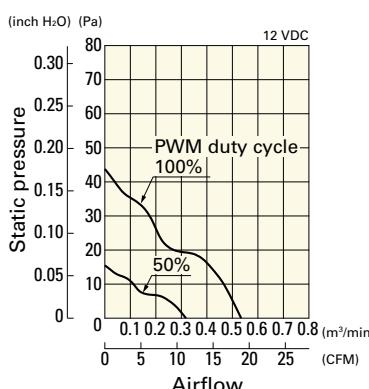

Operating voltage range

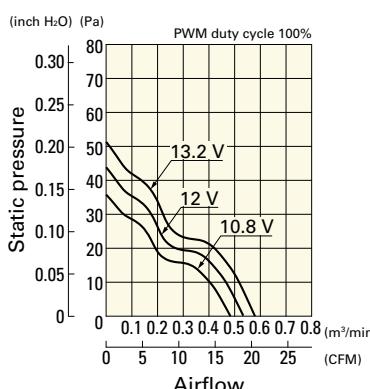


PWM duty - Speed characteristics example

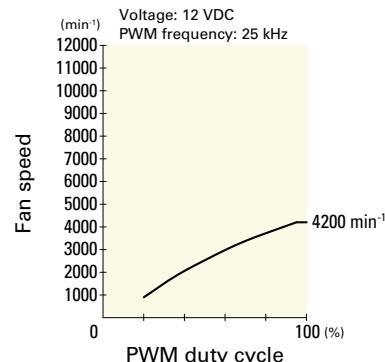


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG0624P4S001 With pulse sensor with PWM control function


PWM duty cycle

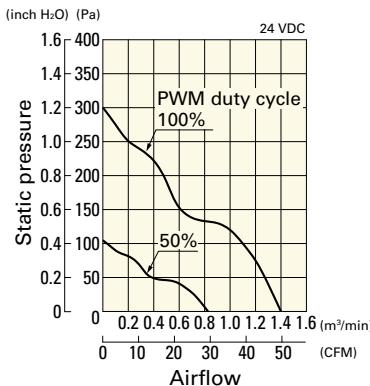

Operating voltage range

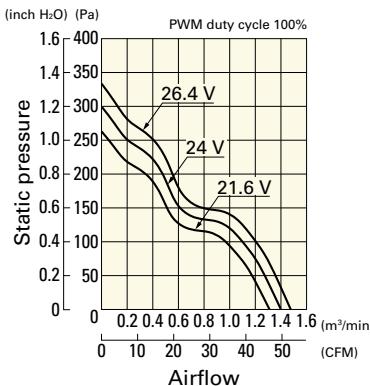


PWM duty - Speed characteristics example

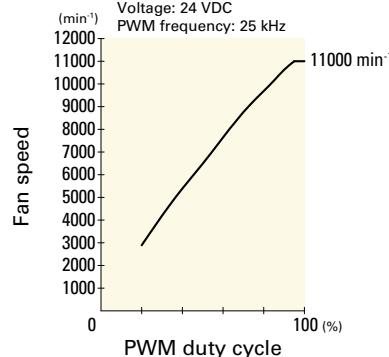


9LG0624P4J001 With pulse sensor with PWM control function


PWM duty cycle

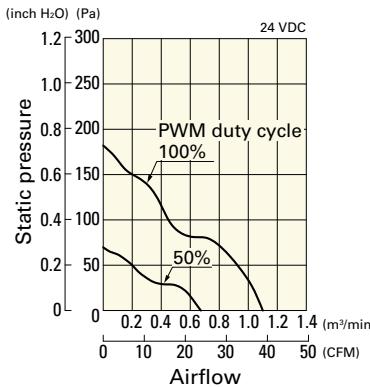

Operating voltage range

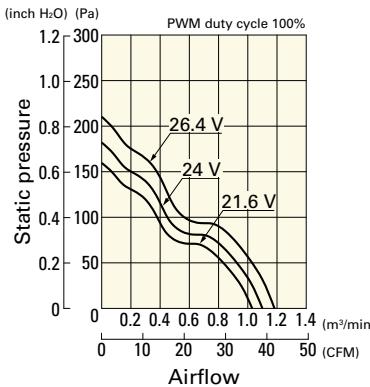


PWM duty - Speed characteristics example

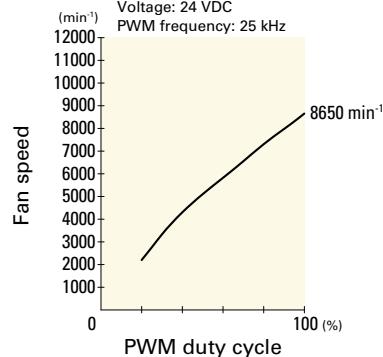


9LG0624P4H001 With pulse sensor with PWM control function


PWM duty cycle

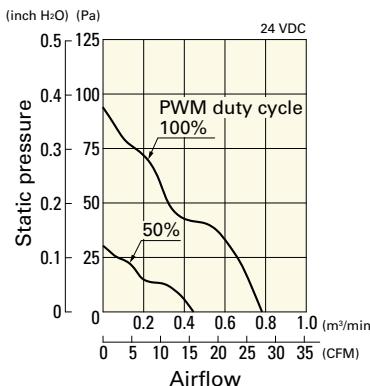

Operating voltage range

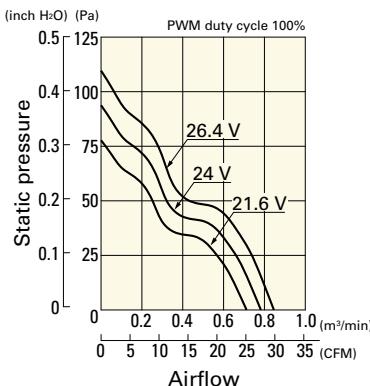


PWM duty - Speed characteristics example

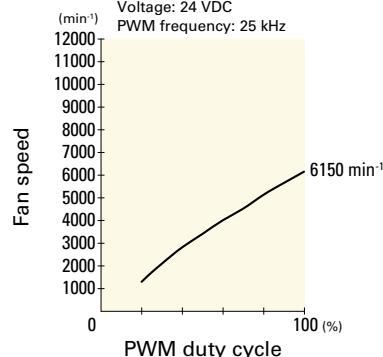


9LG0624P4M001 With pulse sensor with PWM control function


PWM duty cycle

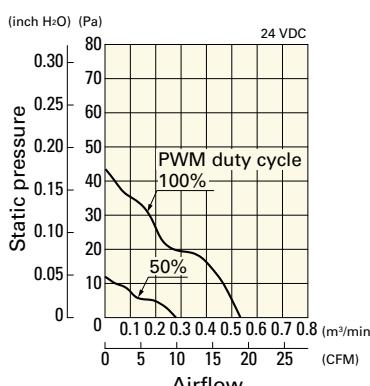

Operating voltage range

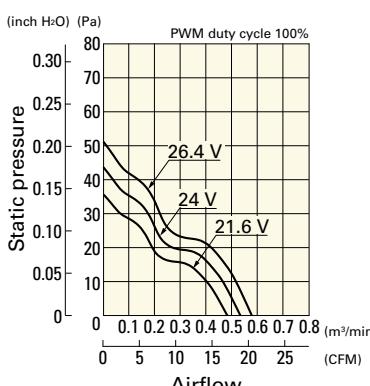


PWM duty - Speed characteristics example

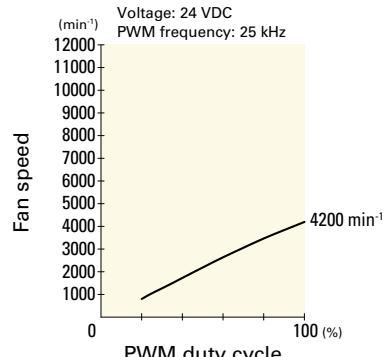


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG0648P4S001 With pulse sensor with PWM control function


PWM duty cycle

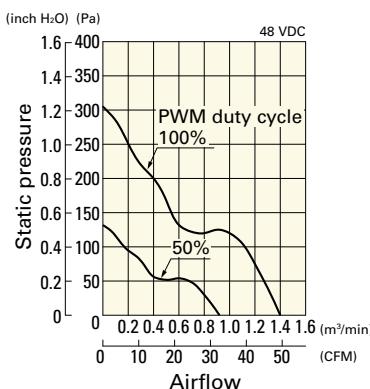

Operating voltage range

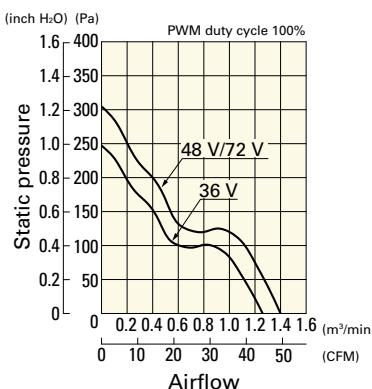


PWM duty - Speed characteristics example

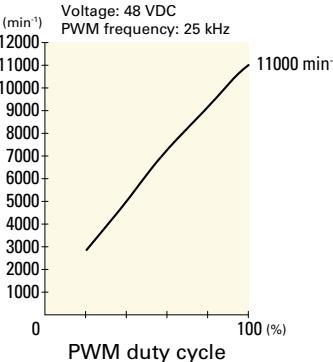


Long Life Fan 60 mm sq. DC

9LG0648P4J001 With pulse sensor with PWM control function


PWM duty cycle

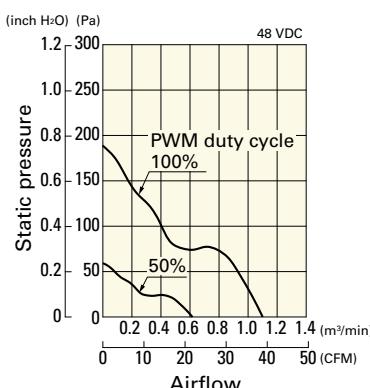

Operating voltage range

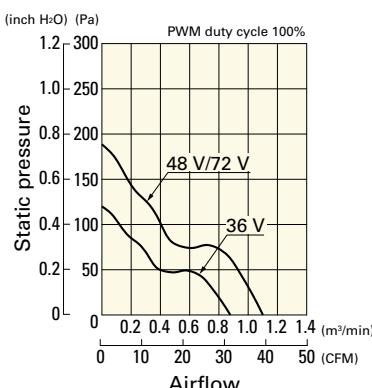


PWM duty - Speed characteristics example

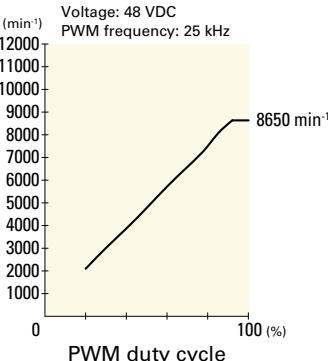


9LG0648P4H001 With pulse sensor with PWM control function


PWM duty cycle

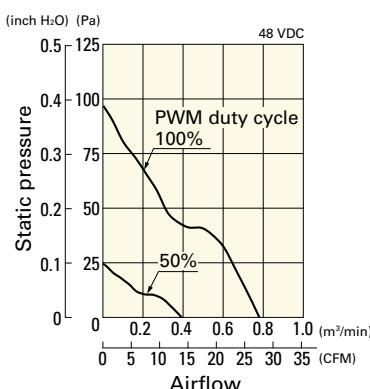

Operating voltage range

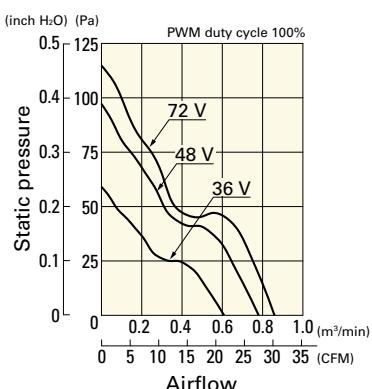


PWM duty - Speed characteristics example

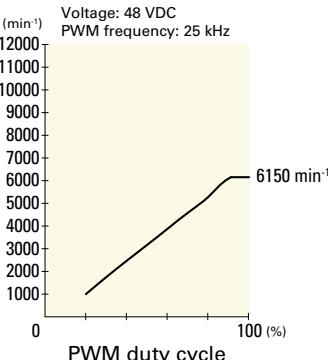


9LG0648P4M001 With pulse sensor with PWM control function


PWM duty cycle

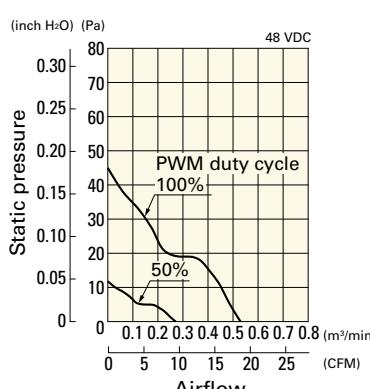


Operating voltage range

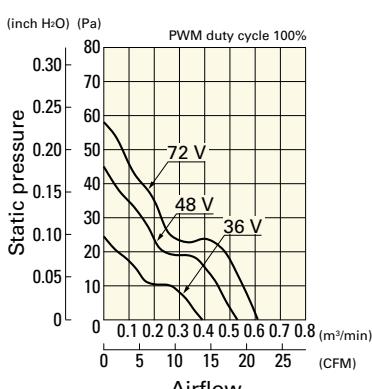

PWM duty - Speed characteristics example

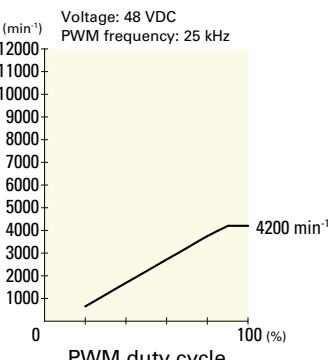


Dimensions (unit: mm)

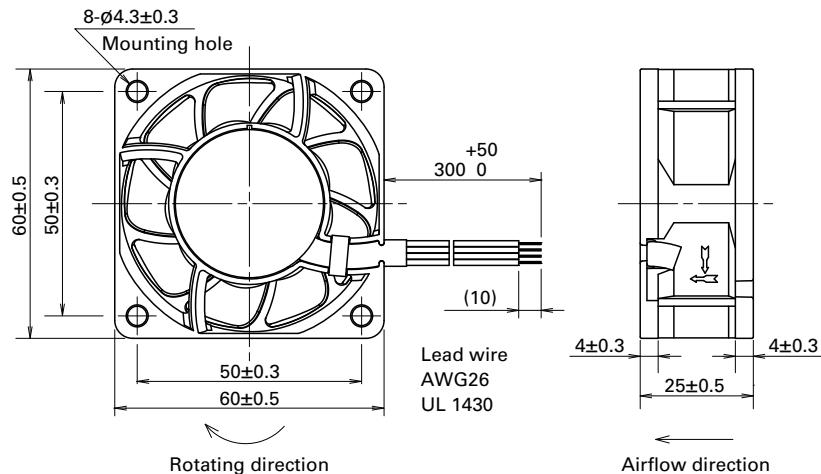

DC

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Long Life Fan 60 mm sq.

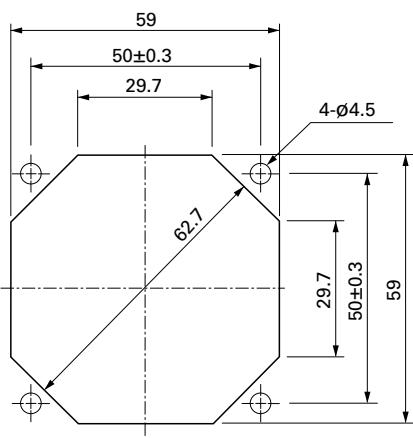

Options

Finger guards

page: p. 564

Model no.: 109-139E, 109-139H

Resin finger guards

page: p. 571

Model no.: 109-1003G

Resin filter kits

page: p. 572

Model no.: 109-1003F13 (13PPI), 109-1003F20 (20PPI),
109-1003F30 (30PPI), 109-1003F40 (40PPI)



60x60x76 mm

San Ace 60L 9CRLA type

General Specifications

- Material Frame: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire Inlet Red Black Yellow Brown
Outlet Orange Gray Purple White
- Mass 310 g

Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹] Inlet Outlet	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9CRLA0612P0G001	12	10.8 to 13.2	100	3.0	36.0	16500 17800	2.1 74.1	1400 5.62	70	-20 to +70	100000/60°C (135000/40°C)
			20	0.4	4.8	5000 5400	0.64 22.6	128 0.51	43		


* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

Note: The mark indicates Short LeadTime Service applicable models. See p. 630 for details.


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9CRLA0612P0G001 With pulse sensor with PWM control function


PWM duty cycle

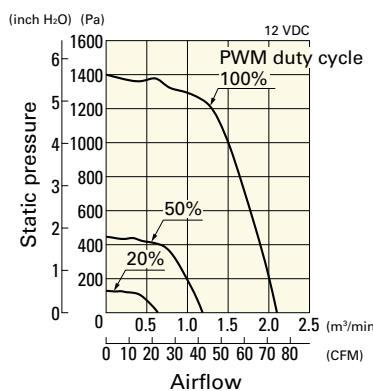


Operating voltage range

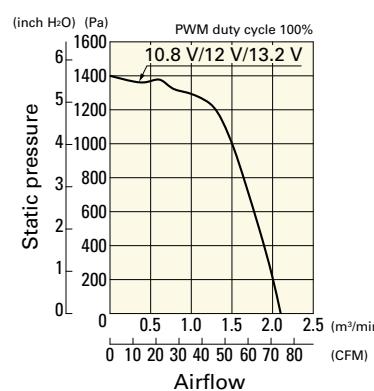

PWM duty - Speed characteristics example

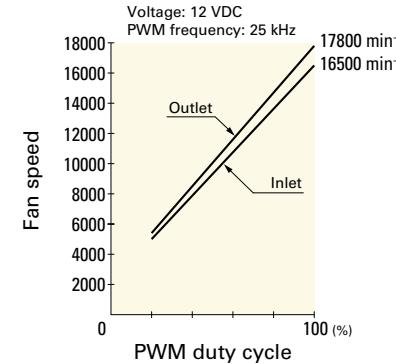


Dimensions (unit: mm)

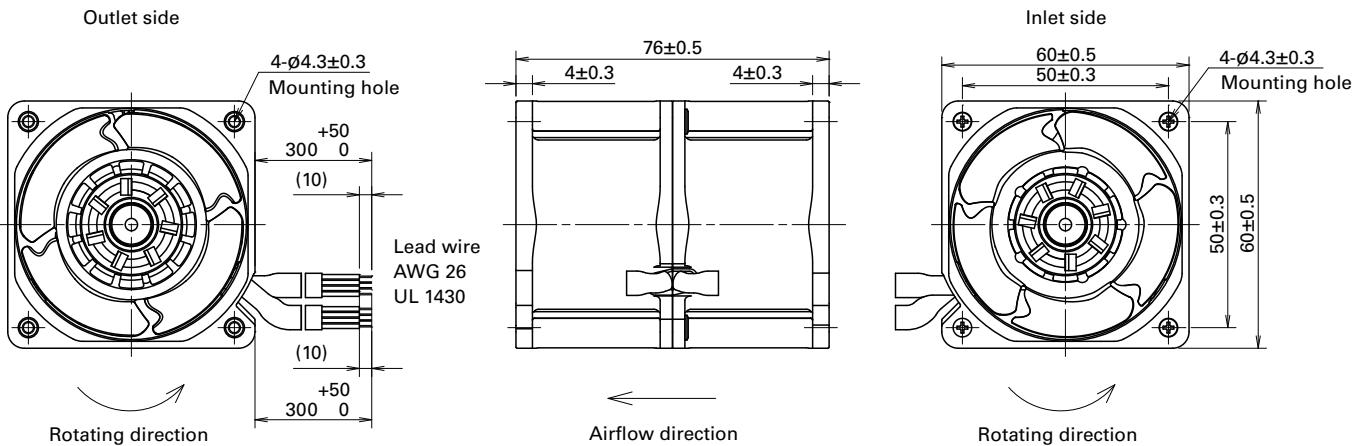

Long Life Fan 60 mm sq. DC

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

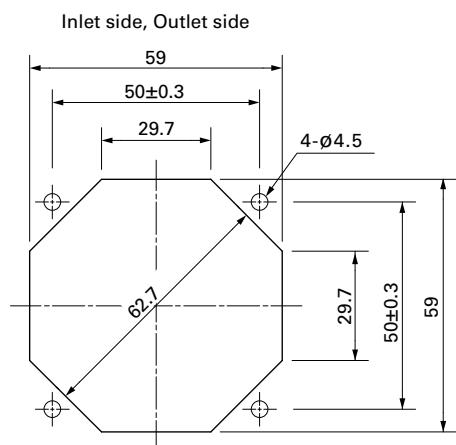

Options

Finger guards

page: p. 564

Model no.: 109-139E, 109-139H

Resin finger guards

page: p. 571

Model no.: 109-1003G

Resin filter kits

page: p. 572

Model no.: 109-1003F13 (13PPI), 109-1003F20 (20PPI),
109-1003F30 (30PPI), 109-1003F40 (40PPI)



80x80x25 mm

San Ace 80L 9LG type

General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire Red Black Sensor Yellow Control Brown
(For models without PWM control function, there is no speed control wiring.)
- Mass 130 g

Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
④ 9LG0812P4J001	12	10.8 to 13.2	100	0.6	7.2	7400	2.07	73.0	177	0.71	49
④ 9LG0812P4G001			20	0.06	0.72	1800	0.5	17.6	10.4	0.04	16
④ 9LG0812P4H001	24	21.6 to 26.4	100	0.3	3.6	5500	1.54	54.3	98	0.39	43
④ 9LG0824P4J001			25	0.05	0.6	1400	0.39	13.7	6.3	0.02	14
④ 9LG0824P4G001			100	0.12	1.44	3700	1.03	36.3	44	0.17	31
④ 9LG0824P4H001			25	0.04	0.48	1100	0.3	10.5	3.9	0.01	13
④ 9LG0824P4J001	24	21.6 to 26.4	100	0.28	6.72	7400	2.07	73.0	177	0.71	49
④ 9LG0824P4G001			20	0.05	1.2	2400	0.67	23.6	18.6	0.07	22
④ 9LG0824P4H001			100	0.14	3.36	5500	1.54	54.3	98	0.39	43
④ 9LG0824P4J001			20	0.02	0.48	1200	0.33	11.6	4.6	0.01	13
④ 9LG0824P4G001			100	0.05	1.2	3700	1.03	36.3	44	0.17	31
④ 9LG0824P4H001			30	0.02	0.48	1100	0.3	10.5	3.9	0.01	13

* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

The models listed below have pulse sensors.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
④ 9LG0812S4001	12	6 to 13.2	0.17	2.04	4200	1.17	41.3	56	0.22	35
④ 9LG0812F4001			0.1	1.2	3300	0.92	32.5	35	0.14	29
④ 9LG0812M4001			0.08	0.96	2900	0.8	28.3	27	0.11	25
④ 9LG0812L4001		8 to 13.2	0.06	0.72	2300	0.64	22.6	17	0.068	22
④ 9LG0824S4001	24	12 to 26.4	0.07	1.68	4200	1.17	41.3	56	0.22	35
④ 9LG0824F4001			0.045	1.08	3300	0.92	32.5	35	0.14	29
④ 9LG0824M4001			0.04	0.96	2900	0.8	28.3	27	0.11	25
④ 9LG0824L4001		14 to 26.4	0.03	0.72	2300	0.64	22.6	17	0.068	22


Note 1: Sensor and control options are available for selection. Refer to the table on p. 613.

Note 2: The  mark indicates Short LeadTime Service applicable models. See p. 630 for details.


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG0812P4J001 With pulse sensor with PWM control function


PWM duty cycle

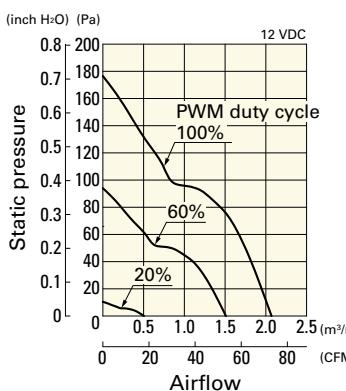

Operating voltage range

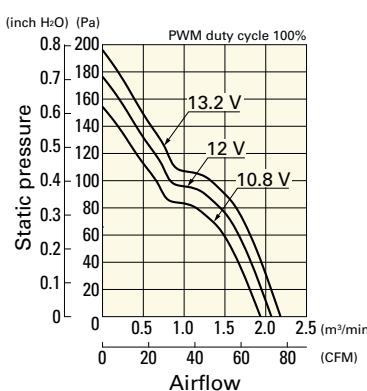


PWM duty - Speed characteristics example

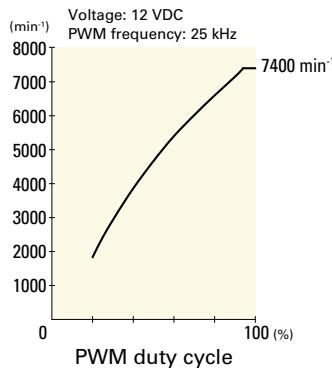


9LG0812P4G001 With pulse sensor with PWM control function


PWM duty cycle

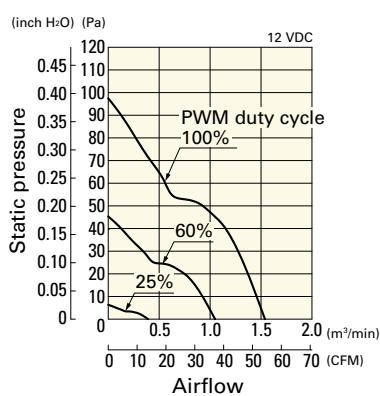

Operating voltage range

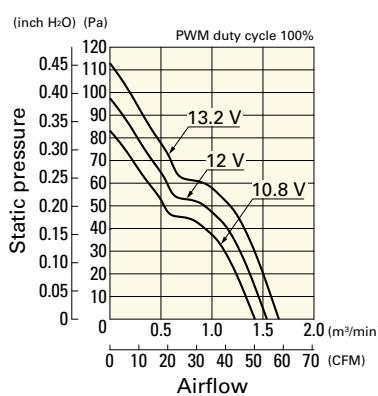


PWM duty - Speed characteristics example

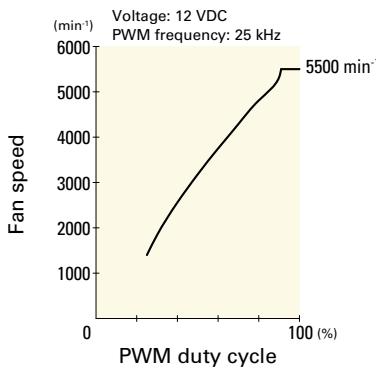


9LG0812P4H001 With pulse sensor with PWM control function


PWM duty cycle

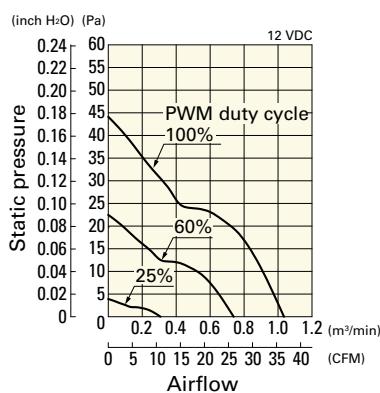

Operating voltage range

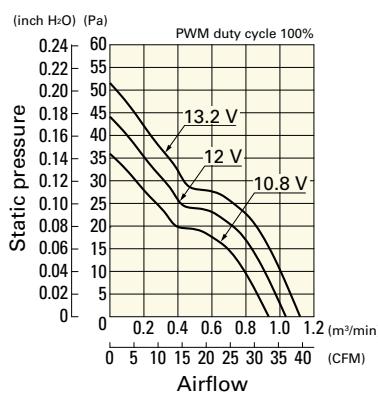


PWM duty - Speed characteristics example

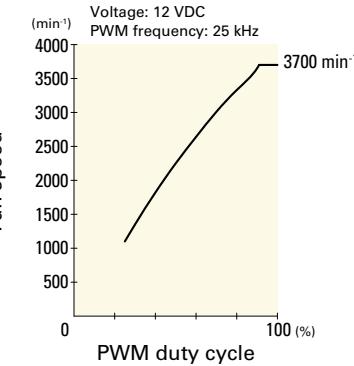


9LG0824P4J001 With pulse sensor with PWM control function


PWM duty cycle

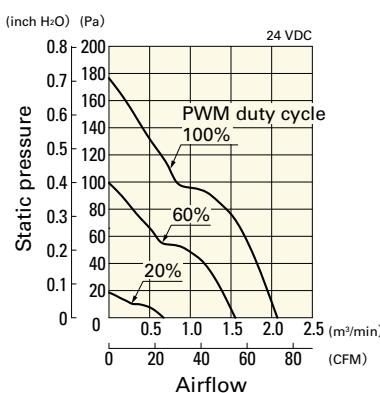

Operating voltage range

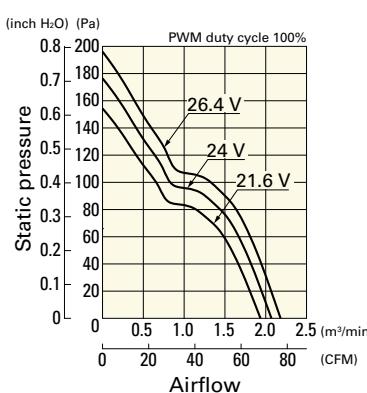


PWM duty - Speed characteristics example

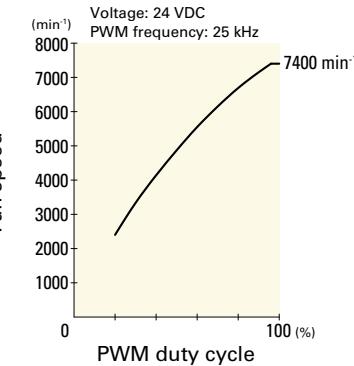


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG0824P4G001 With pulse sensor with PWM control function


PWM duty cycle

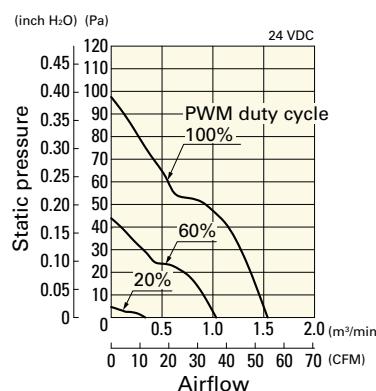

Operating voltage range

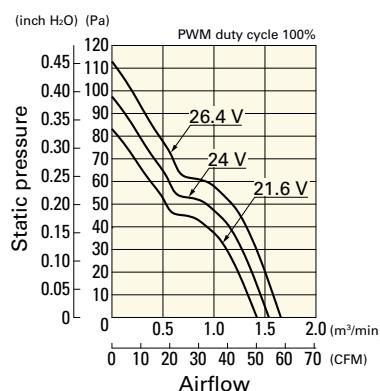


PWM duty - Speed characteristics example

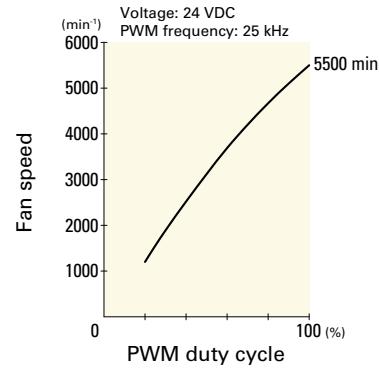


9LG0824P4H001 With pulse sensor with PWM control function


PWM duty cycle

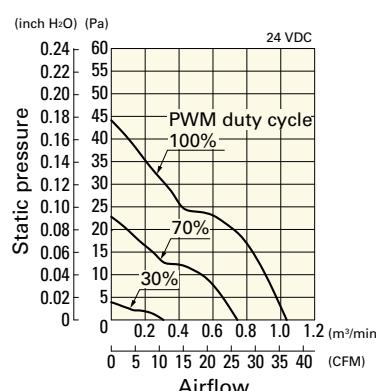

Operating voltage range

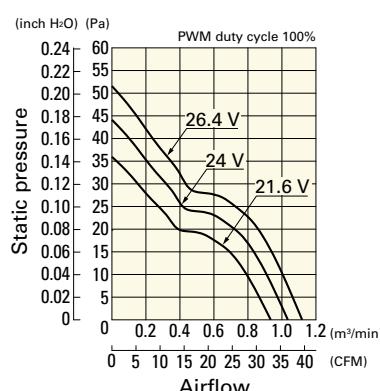


PWM duty - Speed characteristics example

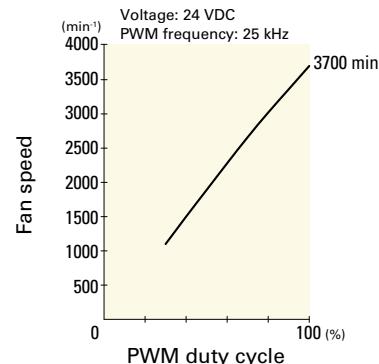


Airflow - Static Pressure Characteristics

9LG0812S4001 With pulse sensor


Operating voltage range

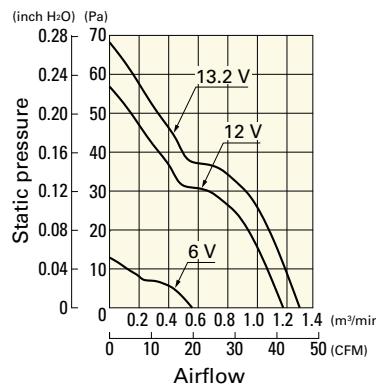

Operating voltage range

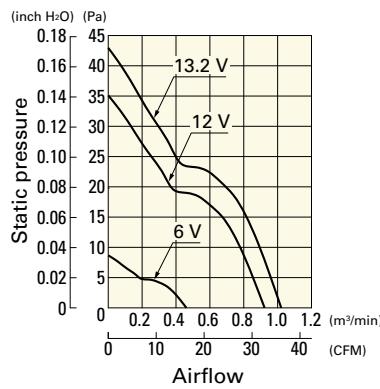


Operating voltage range

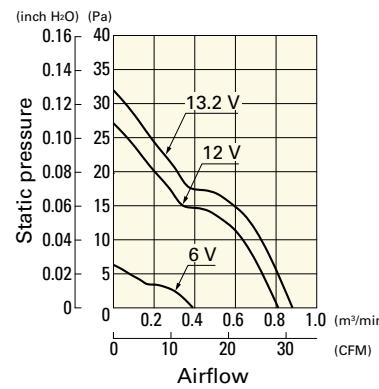

Airflow - Static Pressure Characteristics


9LG0812L4001 With pulse sensor

Operating voltage range

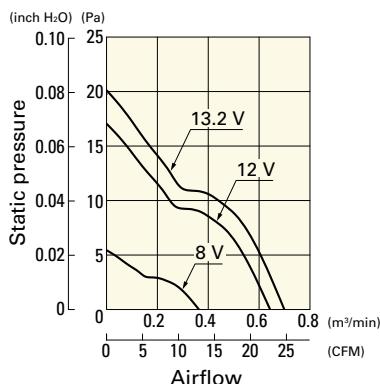


9LG0824S4001 With pulse sensor

Operating voltage range

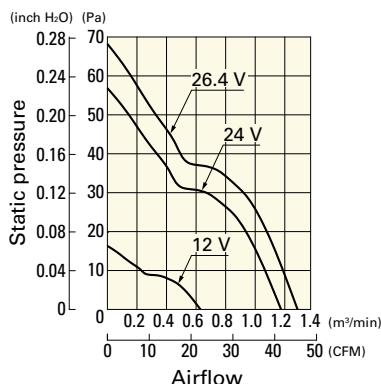


9LG0824F4001 With pulse sensor

Operating voltage range

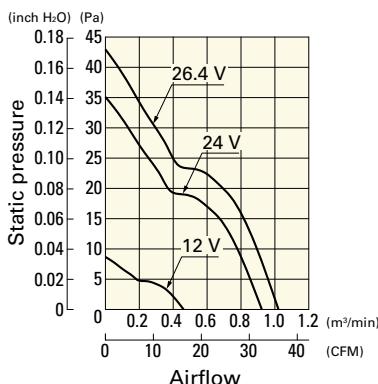


9LG0824M4001 With pulse sensor

Operating voltage range

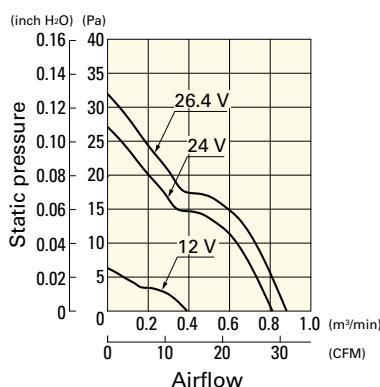


9LG0824L4001 With pulse sensor

Operating voltage range

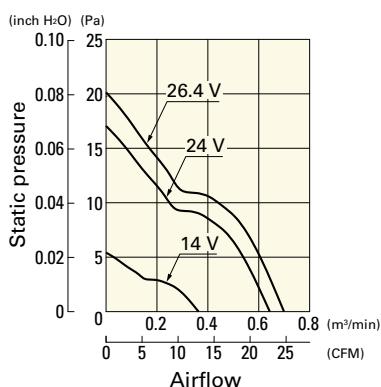


DC

Dimensions (unit: mm) (With pulse sensor with PWM control function)

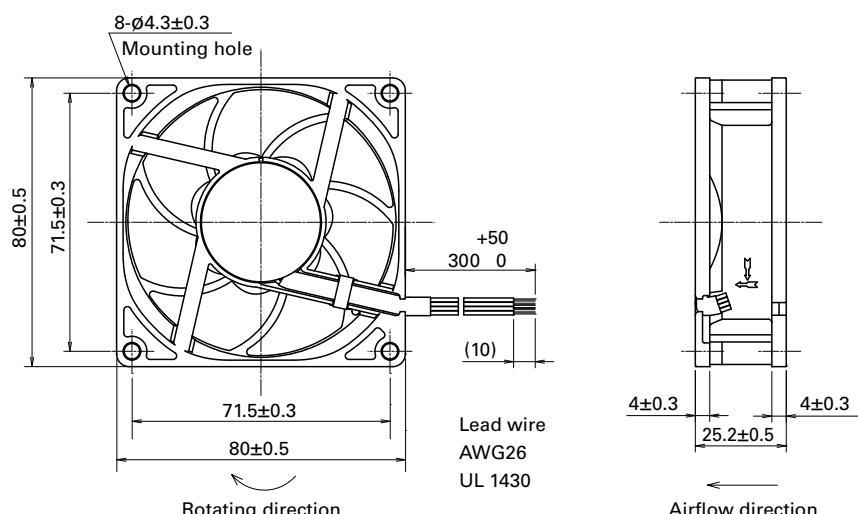

■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

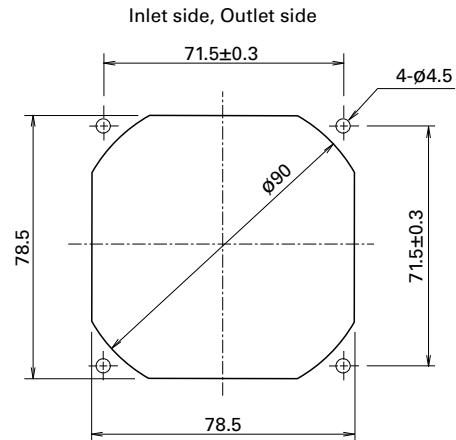

■ Options

Finger guards

page: p. 564

Model no.: 109-049E, 109-049H, 109-049C

Resin finger guards

page: p. 571

Model no.: 109-1002G

Resin filter kits

page: p. 572

Model no.: 109-1002F13 (13PPI), 109-1002F20 (20PPI),
109-1002F30 (30PPI), 109-1002F40 (40PPI)

DC

Long Life Fan 80 mm sq.

80x80x80 mm

San Ace 80L 9CRL type  



General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire Inlet  Red  Black  Yellow  Brown
Outlet  Orange  Gray  Purple  White
- Mass 490 g

Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹] Inlet Outlet	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inch H₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9CRL0812P8G001	12	10.8 to 13.2	100	5.3	63.6	12000 11300	4.5 158.9	1150 4.62	76	-20 to +70	130000/60°C (165000/40°C)


* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

Note: The  mark indicates Short LeadTime Service applicable models. See p. 630 for details.


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9CRL0812P8G001 With pulse sensor with PWM control function


PWM duty cycle

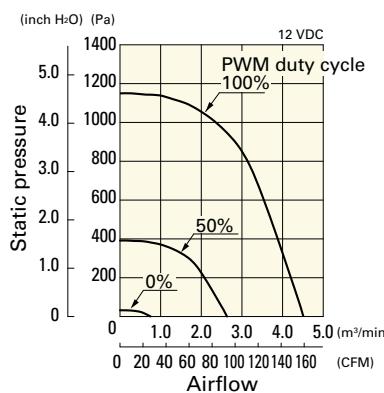


Operating voltage range

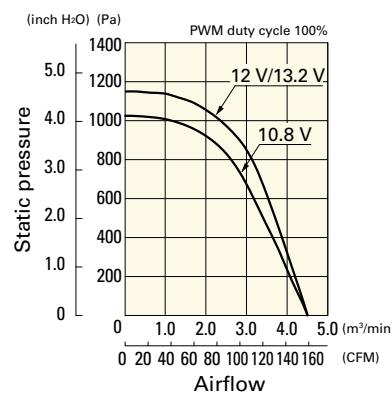


PWM duty - Speed characteristics example

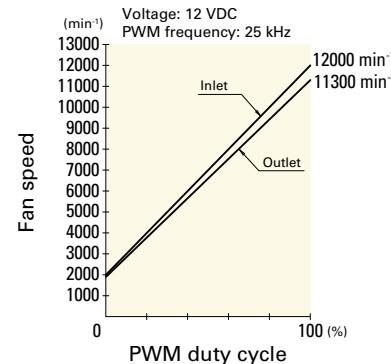

Dimensions (unit: mm)

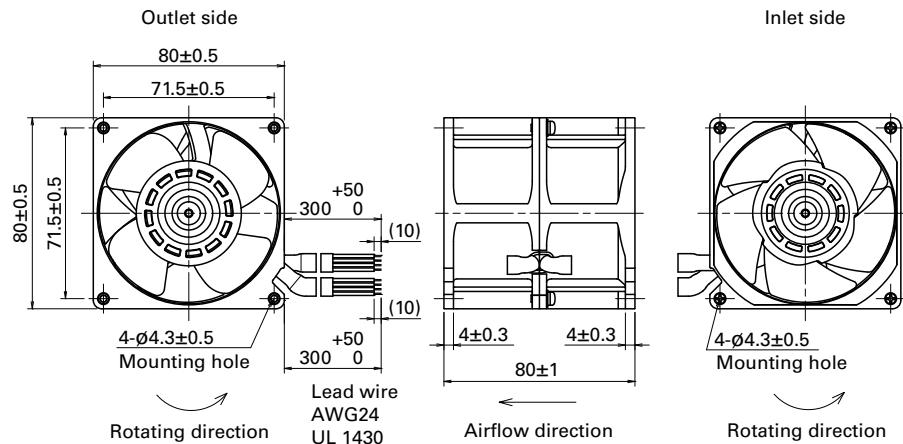

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

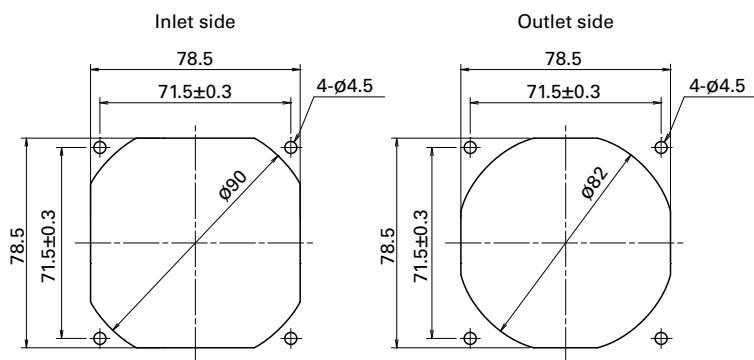

Options

Finger guards

Model no.: 109-049E, 109-049H

page: p. 564

Resin finger guards

page: p. 571

Resin filter kits

Model no.: 109-1002F13 (13PPI), 109-1002F20 (20PPI),
109-1002F30 (30PPI), 109-1002F40 (40PPI)

page: p. 572

Long Life Fan

92x92x25 mm

ECO PRODUCTS



San Ace 92L 9LG type

Long Life Fan 92 mm sq.
DC

General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire Red Black Yellow Brown
(For models without PWM control function, there is no speed control wiring.)
- Mass 150 g

Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9LG0912P4J001	12	10.8 to 13.2	100	0.42	5.04	5000	2.2 77.7	105 0.42	44	-20 to +70	180000/60°C (215000/40°C)
9LG0912P4G001			100	0.3	3.6	4400	1.93 68.2	81 0.33	40		
9LG0912P4S001			100	0.22	2.64	3850	1.69 59.7	62.1 0.25	37		
9LG0912P4H001			100	0.15	1.8	3150	1.38 48.7	41.6 0.17	32		
9LG0924P4J001	24	21.6 to 26.4	100	0.21	5.04	5000	2.2 77.7	105 0.42	44	-20 to +70	180000/60°C (215000/40°C)
9LG0924P4G001			100	0.15	3.6	4400	1.93 68.2	81 0.33	40		
9LG0924P4S001			100	0.11	2.64	3850	1.69 59.7	62.1 0.25	37		
9LG0924P4H001			100	0.07	1.68	3150	1.38 48.7	41.6 0.17	32		

* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

The models listed below have pulse sensors.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9LG0912F4J001	12	10.2 to 13.8	0.1	1.2	2800	1.22 43.1	32.8 0.13	29	-20 to +70	180000/60°C (215000/40°C)
9LG0912M4001			0.08	0.96	2400	1.05 37.1	24.1 0.097	24		
9LG0912L4001			0.07	0.84	2000	0.87 30.7	16.7 0.067	19		
9LG0924F4001			0.05	1.2	2800	1.22 43.1	32.8 0.13	29		
9LG0924M4001	24	20.4 to 27.6	0.04	0.96	2400	1.05 37.1	24.1 0.097	24		
9LG0924L4001			0.03	0.72	2000	0.87 30.7	16.7 0.067	19		


Note 1: Sensor and control options are available for selection. Refer to the table on p. 613.

Note 2: The mark indicates Short LeadTime Service applicable models. See p. 630 for details.


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG0912P4J001 With pulse sensor with PWM control function


PWM duty cycle

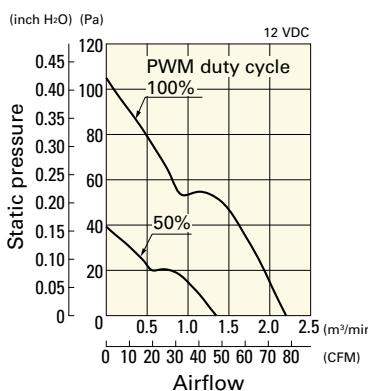

Operating voltage range

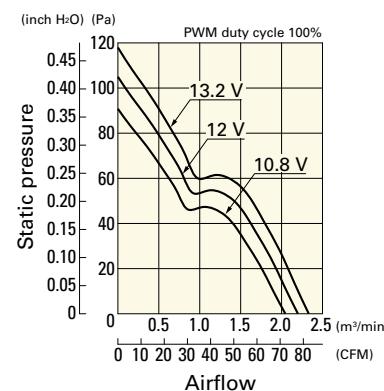


PWM duty - Speed characteristics example

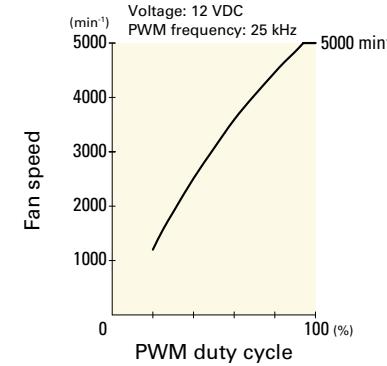


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG0912P4G001 With pulse sensor with PWM control function


PWM duty cycle

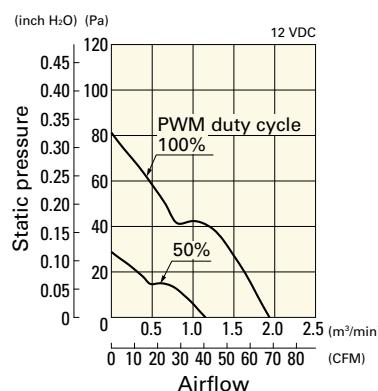

Operating voltage range

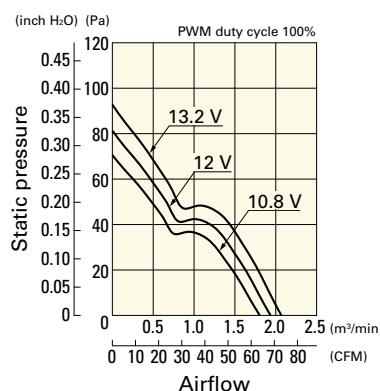


PWM duty - Speed characteristics example

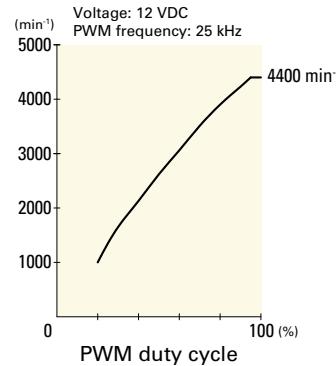


9LG0912P4S001 With pulse sensor with PWM control function


PWM duty cycle

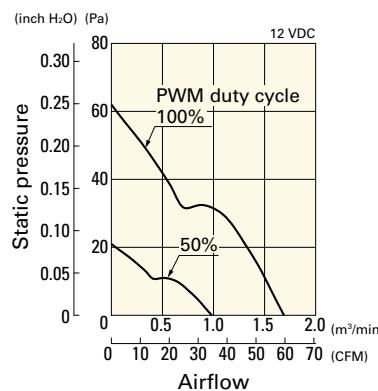

Operating voltage range

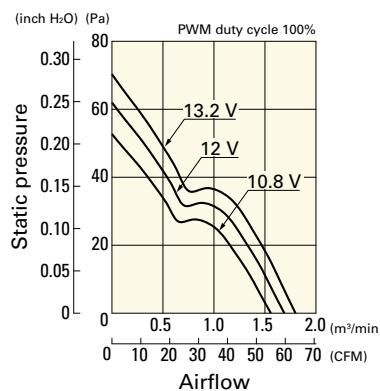


PWM duty - Speed characteristics example

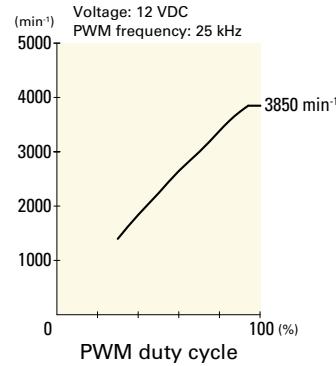


9LG0912P4H001 With pulse sensor with PWM control function


PWM duty cycle

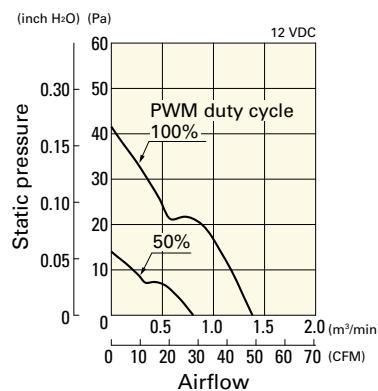

Operating voltage range

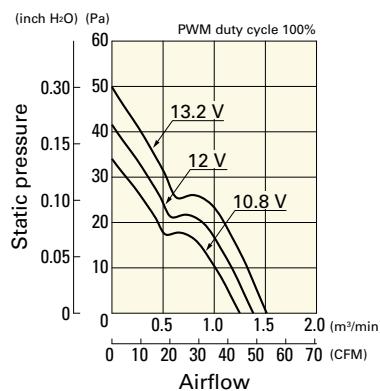


PWM duty - Speed characteristics example

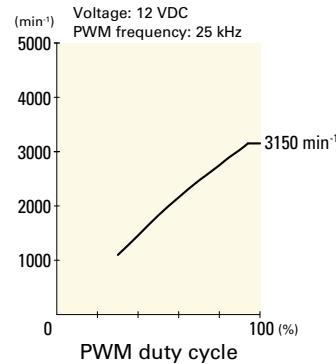


9LG0924P4J001 With pulse sensor with PWM control function


PWM duty cycle

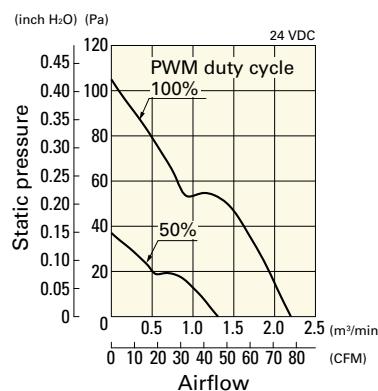

Operating voltage range

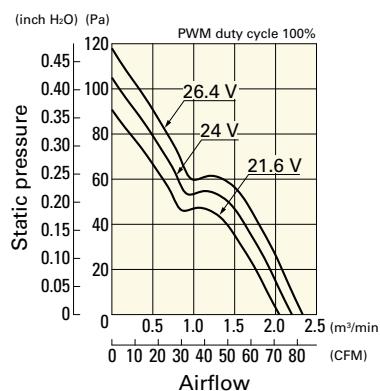


PWM duty - Speed characteristics example

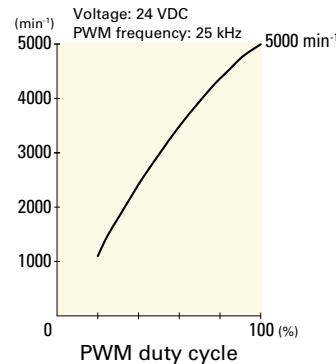


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG0924P4G001 With pulse sensor with PWM control function


PWM duty cycle

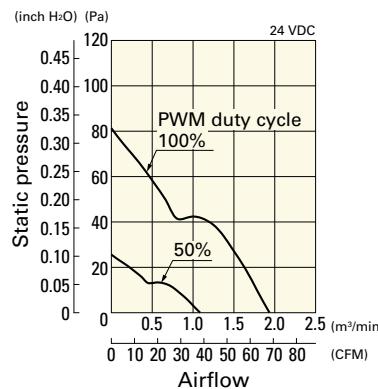

Operating voltage range

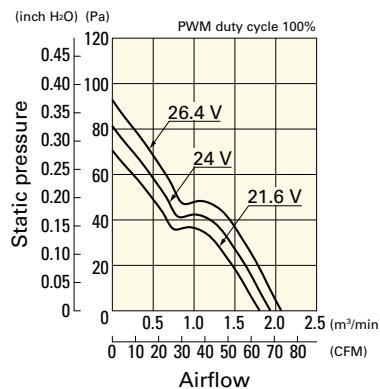


PWM duty - Speed characteristics example

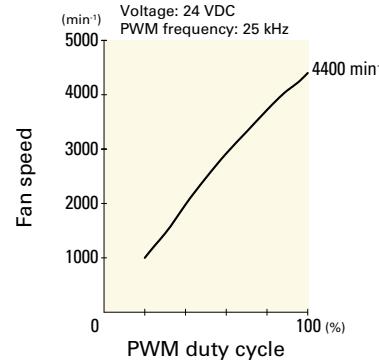


9LG0924P4S001 With pulse sensor with PWM control function


PWM duty cycle

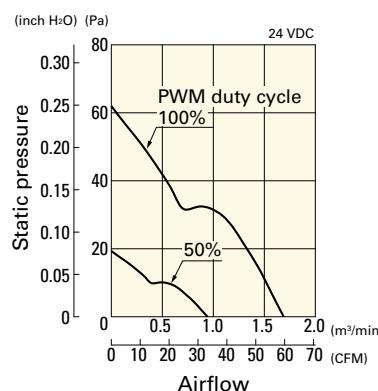

Operating voltage range

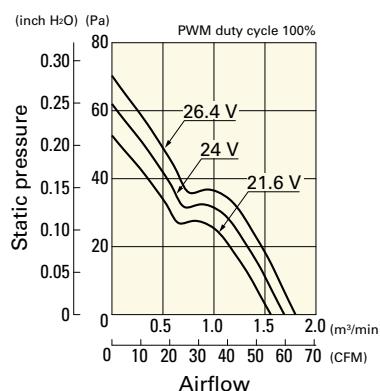


PWM duty - Speed characteristics example

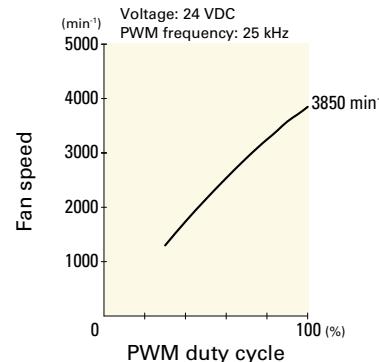


9LG0924P4H001 With pulse sensor with PWM control function


PWM duty cycle

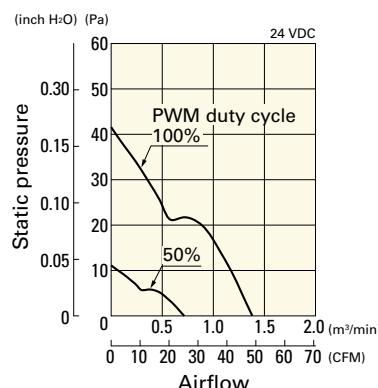

Operating voltage range

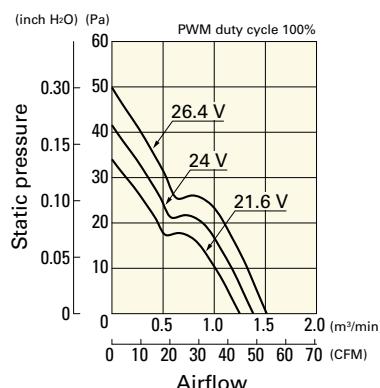

PWM duty - Speed characteristics example

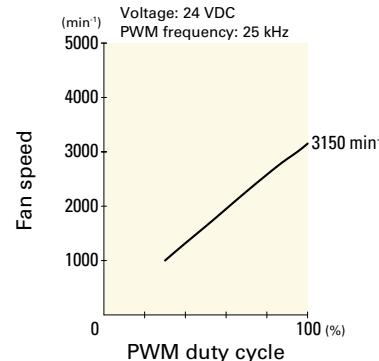


Long Life Fan 92 mm sq.

DC

Airflow - Static Pressure Characteristics


9LG0912F4001 With pulse sensor

Operating voltage range

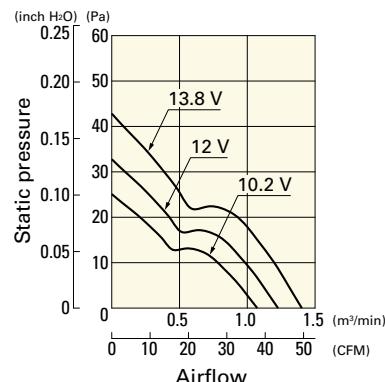


9LG0912M4001 With pulse sensor

Operating voltage range

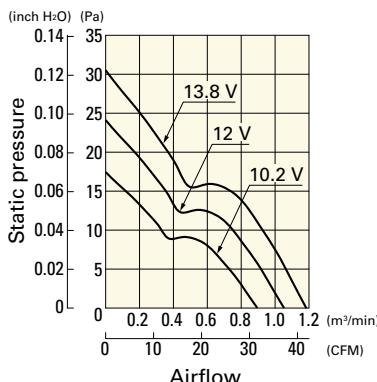


9LG0912L4001 With pulse sensor

Operating voltage range

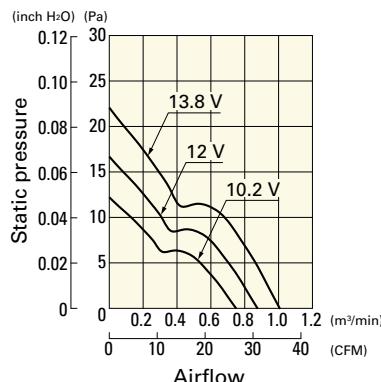


9LG0924F4001 With pulse sensor

Operating voltage range

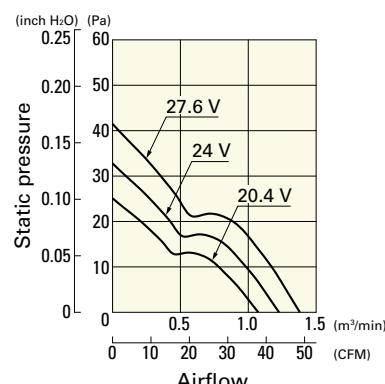


9LG0924M4001 With pulse sensor

Operating voltage range

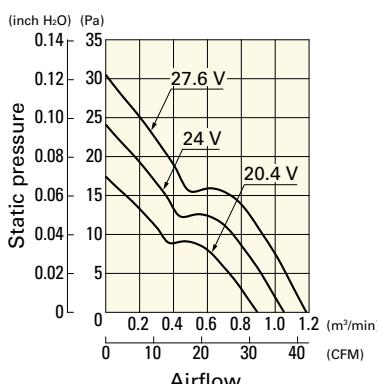

9LG0924L4001 With pulse sensor


Operating voltage range

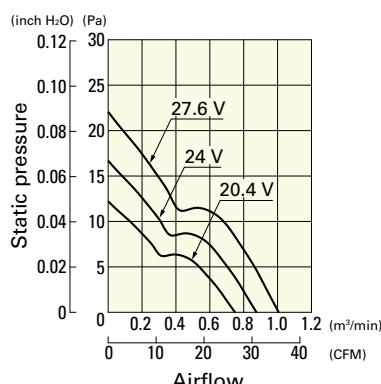


Long Life Fan 92 mm sq.

DC

Dimensions (unit: mm) (With pulse sensor with PWM control function)

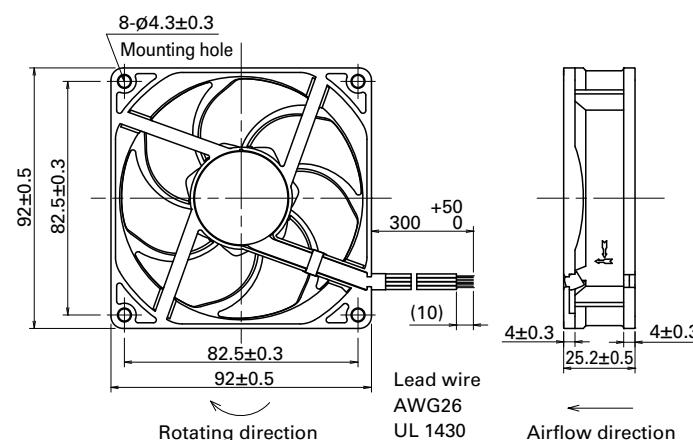

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

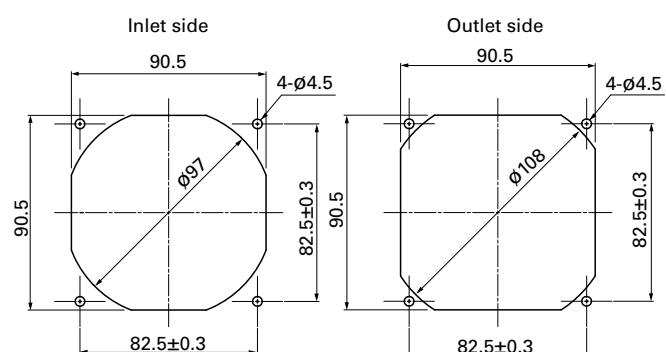

Options

Finger guards

page: p. 564

Model no.: 109-099E, 109-099H, 109-099C

Resin finger guards

page: p. 571

Model no.: 109-1001G

Resin filter kits

page: p. 572

Model no.: 109-1001F13 (13PPI), 109-1001F20 (20PPI),
109-1001F30 (30PPI), 109-1001F40 (40PPI)

Long Life Fan

92x92x38 mm

**San Ace 92L 9LG type △ cULus**

General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire \oplus Red \ominus Black Sensor Yellow Control Brown
- Mass 270 g

Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle* [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
④ 9LG0912P1H001	12	10.2 to 13.8	100	2.0	24.0	9000	3.7 130.6	430 1.72	61	-20 to +70	180000/60°C (215000/40°C)
			20	0.18	2.16	2700	1.11 39.1	38.7 0.15	30		
④ 9LG0912P1F001			100	1.0	12.0	7000	2.9 102.4	263 1.05	55		
			20	0.11	1.32	2000	0.83 29.3	21.5 0.08	22		
④ 9LG0924P1H001	24	20.4 to 27.6	100	0.9	21.6	9000	3.7 130.6	430 1.72	61		
			20	0.08	1.92	2700	1.11 39.1	38.7 0.15	30		
④ 9LG0924P1F001			100	0.5	12.0	7000	2.9 102.4	263 1.05	55		
			20	0.06	1.44	2000	0.83 29.3	21.5 0.08	22		

* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.


Note 1: Sensor and control options are available for selection. Refer to the table on p. 613.

Note 2: The ④ mark indicates Short LeadTime Service applicable models. See p. 630 for details.


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG0912P1H001 With pulse sensor with PWM control function


PWM duty cycle

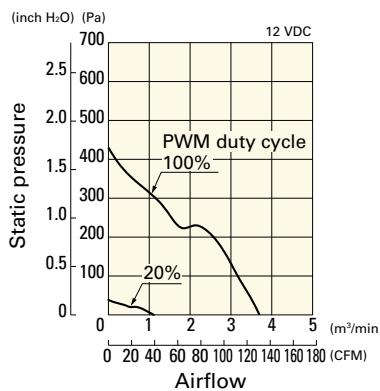

Operating voltage range

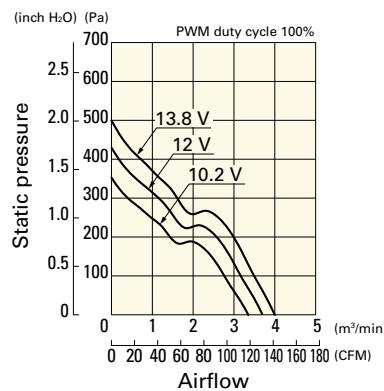


PWM duty - Speed characteristics example

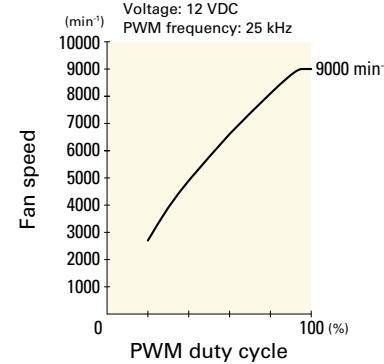


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG0912P1F001 With pulse sensor with PWM control function


PWM duty cycle

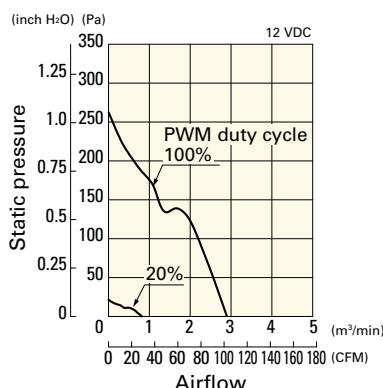

Operating voltage range

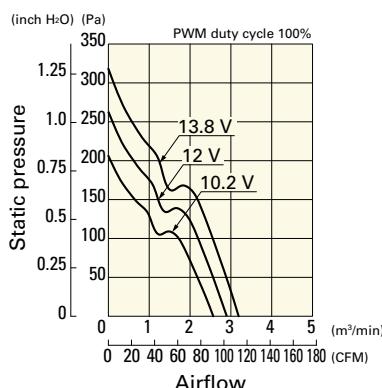


PWM duty - Speed characteristics example

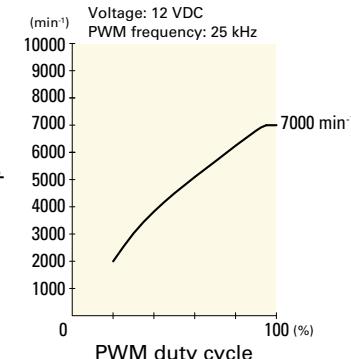


9LG0924P1H001 With pulse sensor with PWM control function


PWM duty cycle

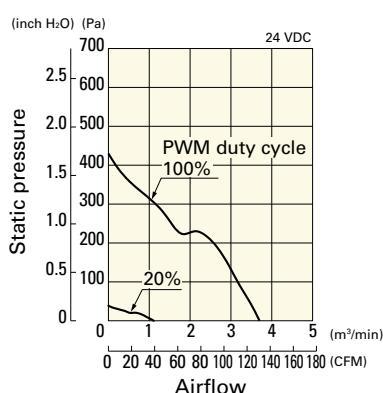

Operating voltage range

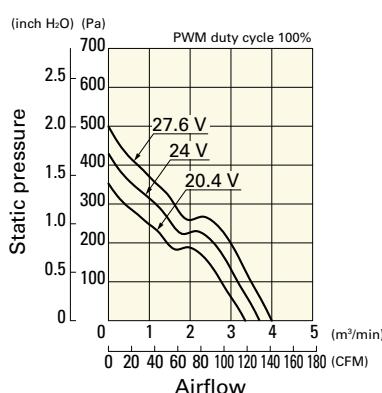


PWM duty - Speed characteristics example

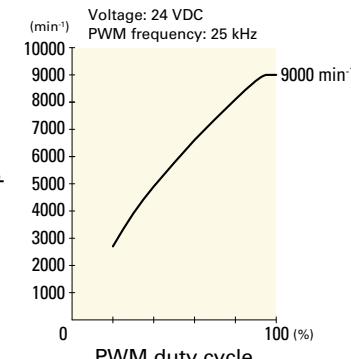


9LG0924P1F001 With pulse sensor with PWM control function


PWM duty cycle

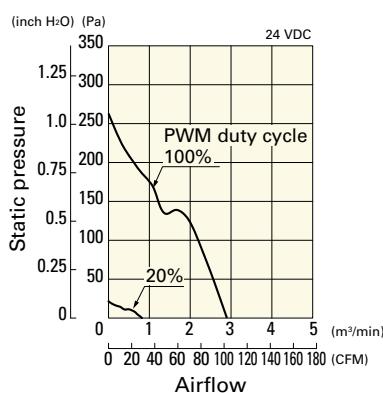


Operating voltage range

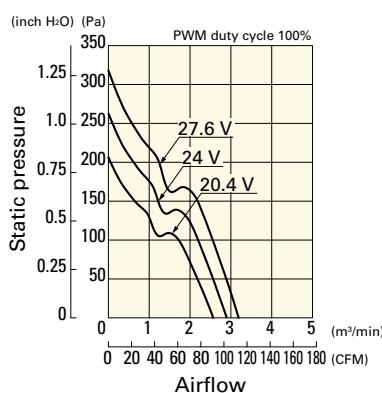


PWM duty - Speed characteristics example

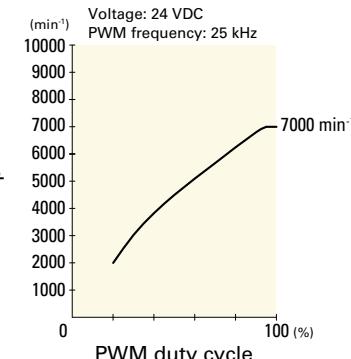

Dimensions (unit: mm)

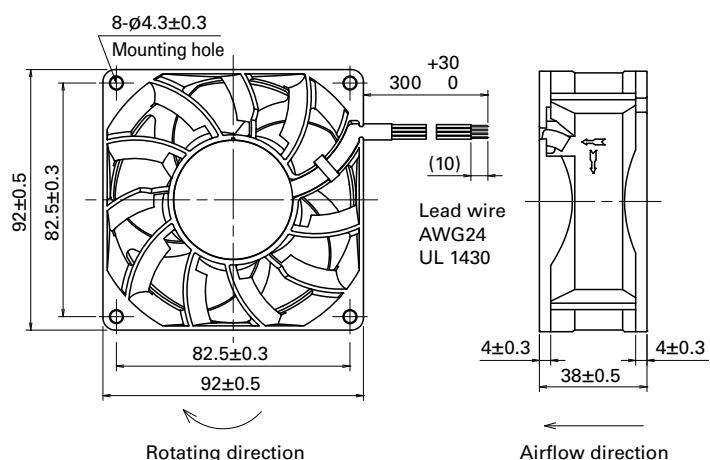

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

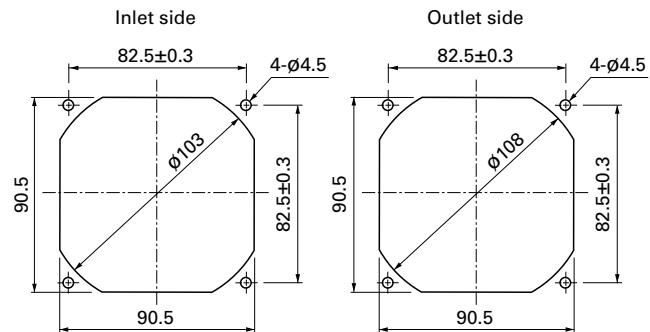

Options

Finger guards

page: p. 564

Model no.: 109-099E, 109-099H, 109-099C

Resin finger guards

page: p. 571

Model no.: 109-1001G

Resin filter kits

page: p. 572

Model no.: 109-1001F13 (13PPI), 109-1001F20 (20PPI),
109-1001F30 (30PPI), 109-1001F40 (40PPI)



120x120x38 mm

San Ace 120L 9LG type

General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire Red Black Yellow Brown
(For models without PWM control function, there is no speed control wiring.)
- Mass 420 g

Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
④ 9LG1212P1G001	12	8.0 to 13.8	100	3.2	38.4	6550	7.0 247.1	370 1.48	62	-20 to +70 180000/60°C (215000/40°C)	
④ 9LG1212P1S001			20	0.24	2.88	2000	2.13 75.2	34.4 0.13	36		
④ 9LG1212P1H001	24	15 to 30	100	2.2	26.4	5600	6.0 211.8	270 1.08	58		
④ 9LG1224P1G001			20	0.24	2.88	2000	2.13 75.2	34.4 0.13	36		
④ 9LG1224P1S001	48	36 to 60	100	1.4	16.8	4700	5.0 176.5	190 0.76	54		
④ 9LG1224P1H001			20	0.24	2.88	2000	2.13 75.2	34.4 0.13	36		
④ 9LG1248P1G001	12	8 to 13.8	100	0.8	38.4	6550	7.0 247.1	370 1.48	62		
④ 9LG1248P1S001			20	0.08	3.84	2000	2.13 75.2	34.4 0.13	36		
④ 9LG1248P1H001	24	15 to 30	100	0.55	26.4	5600	6.0 211.8	270 1.08	58		
④ 9LG1248F1001			20	0.08	3.84	2000	2.13 75.2	34.4 0.13	36		
④ 9LG1248M1001	48	36 to 60	100	0.35	16.8	4700	5.0 176.5	190 0.76	54		
④ 9LG1248M1001			20	0.08	3.84	2000	2.13 75.2	34.4 0.13	36		

* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

The models listed below have pulse sensors.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
④ 9LG1212F1001	12	8 to 13.8	0.39	4.68	2800	3 106	67.6 0.27	39	-20 to +70 180000/60°C (215000/40°C)	
④ 9LG1212M1001			0.22	2.64	2100	2.2 77.7	37.9 0.15	33		
④ 9LG1224A1001	24	15 to 30	0.37	8.88	3700	3.9 137.8	117.8 0.47	48		
④ 9LG1224F1001			0.19	4.56	2800	3 106	67.6 0.27	39		
④ 9LG1224M1001	48	36 to 60	0.11	2.64	2100	2.2 77.7	37.9 0.15	33		
④ 9LG1248F1001			0.11	5.28	2800	3 106	67.6 0.27	39		
④ 9LG1248M1001			0.07	3.36	2100	2.2 77.7	37.9 0.15	33		


Note 1: Sensor and control options are available for selection. Refer to the table on pp. 613 to 614.

Note 2: The ④ mark indicates Short LeadTime Service applicable models. See p. 630 for details.


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG1212P1G001 With pulse sensor with PWM control function


PWM duty cycle

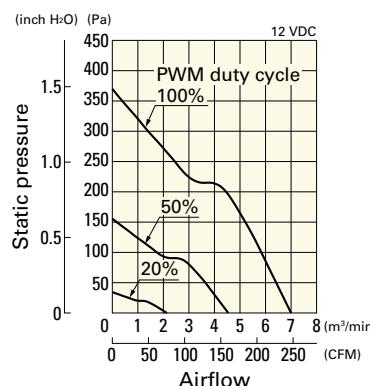

Operating voltage range

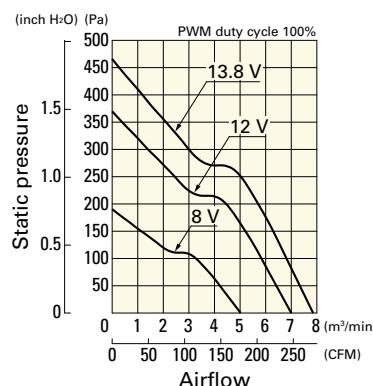


PWM duty - Speed characteristics example

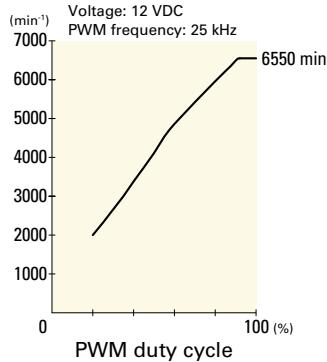


9LG1212P1S001 With pulse sensor with PWM control function


PWM duty cycle

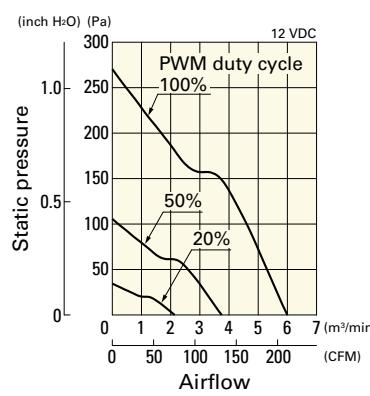

Operating voltage range

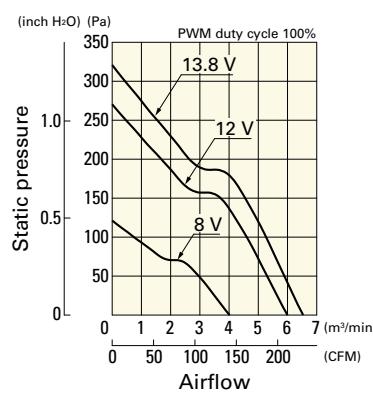


PWM duty - Speed characteristics example

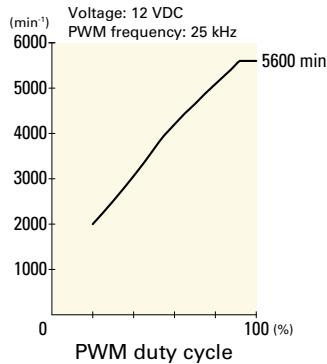


9LG1212P1H001 With pulse sensor with PWM control function


PWM duty cycle

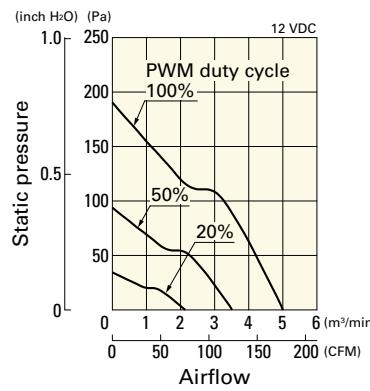

Operating voltage range

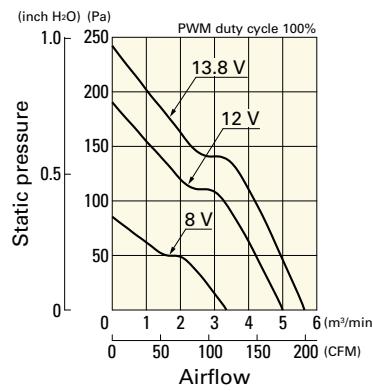


PWM duty - Speed characteristics example

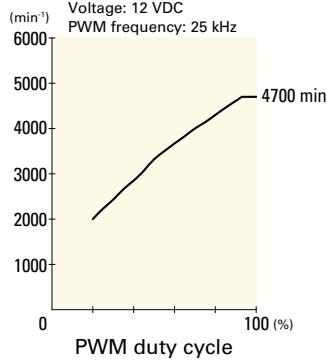


9LG1224P1G001 With pulse sensor with PWM control function


PWM duty cycle

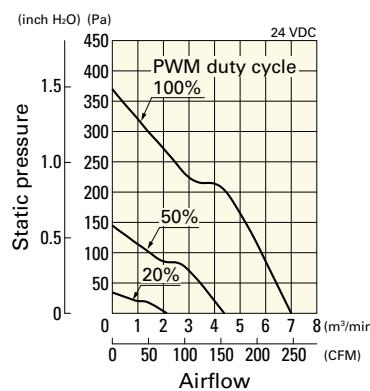

Operating voltage range

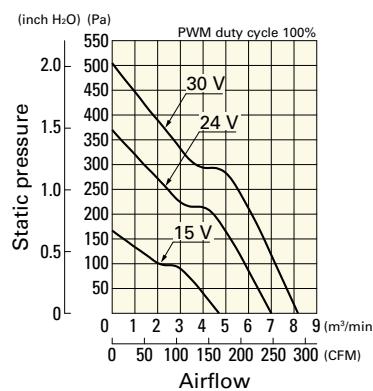


PWM duty - Speed characteristics example

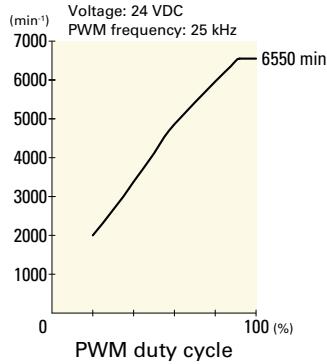


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG1224P1S001 With pulse sensor with PWM control function


PWM duty cycle

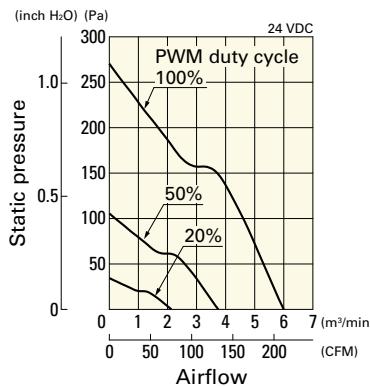

Operating voltage range

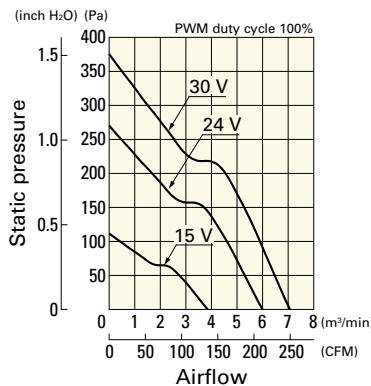


PWM duty - Speed characteristics example

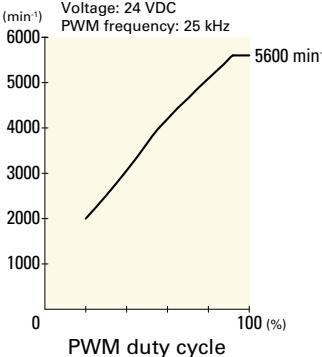


9LG1224P1H001 With pulse sensor with PWM control function


PWM duty cycle

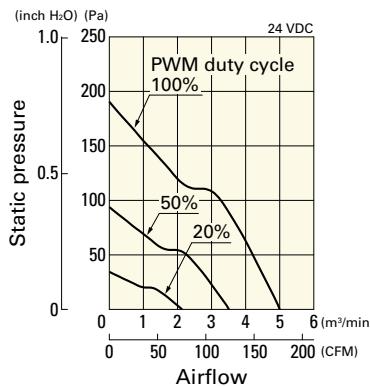

Operating voltage range

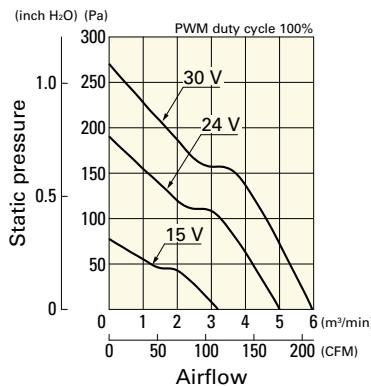


PWM duty - Speed characteristics example

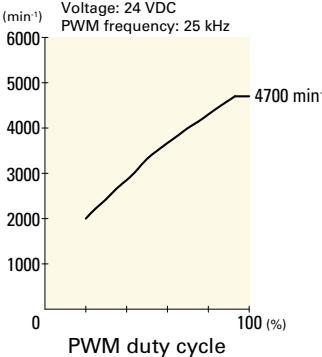


9LG1248P1G001 With pulse sensor with PWM control function


PWM duty cycle

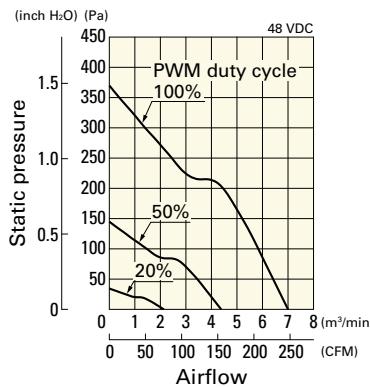

Operating voltage range

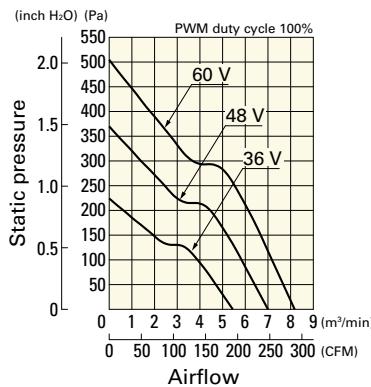


PWM duty - Speed characteristics example

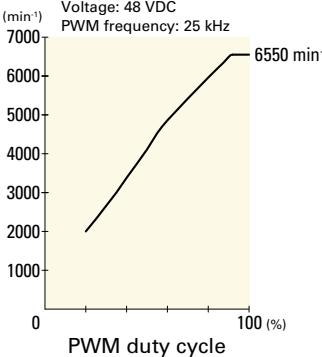


9LG1248P1S001 With pulse sensor with PWM control function


PWM duty cycle

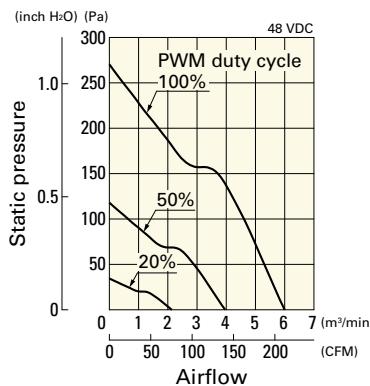

Operating voltage range

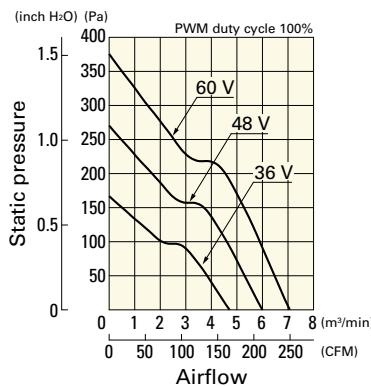


PWM duty - Speed characteristics example

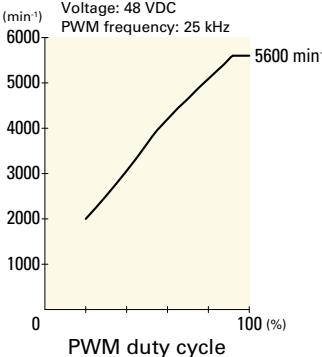


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG1248P1H001 With pulse sensor with PWM control function


PWM duty cycle

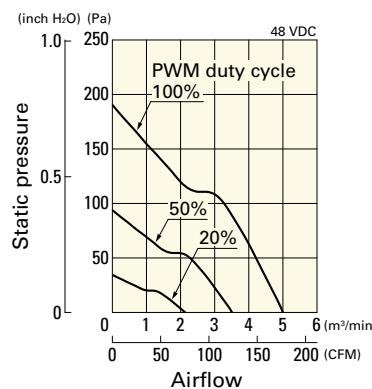

Operating voltage range

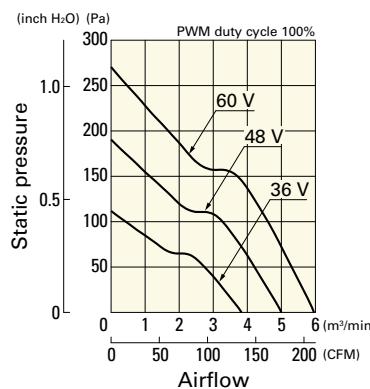


PWM duty - Speed characteristics example

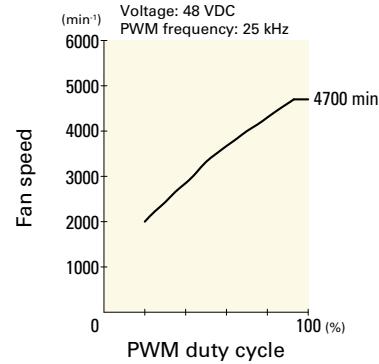

Airflow - Static Pressure Characteristics


9LG1212F1001 With pulse sensor

Operating voltage range

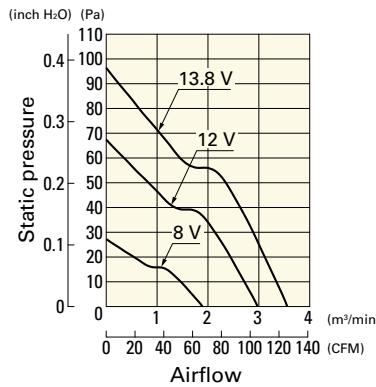


9LG1212M1001 With pulse sensor

Operating voltage range

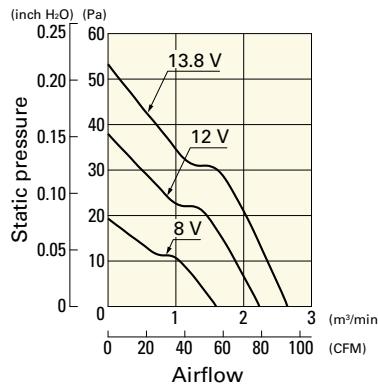


9LG1224A1001 With pulse sensor

Operating voltage range

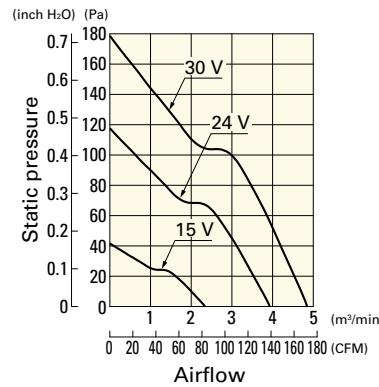


9LG1224F1001 With pulse sensor

Operating voltage range

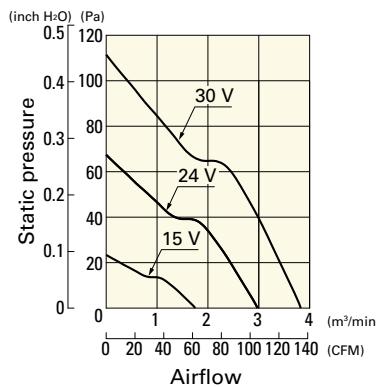


9LG1224M1001 With pulse sensor

Operating voltage range

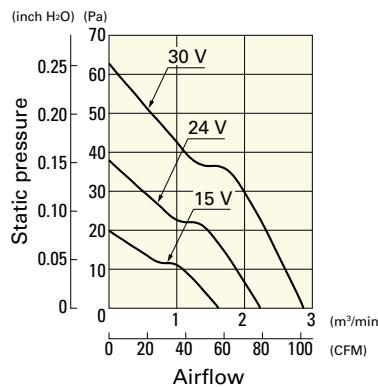

9LG1248F1001 With pulse sensor


Operating voltage range

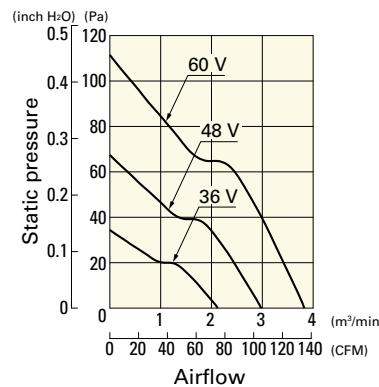

Airflow - Static Pressure Characteristics


9LG1248M1001 With pulse sensor

Operating voltage range

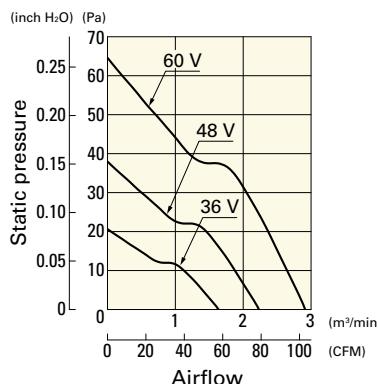


DC

Long Life Fan 120 mm sq.

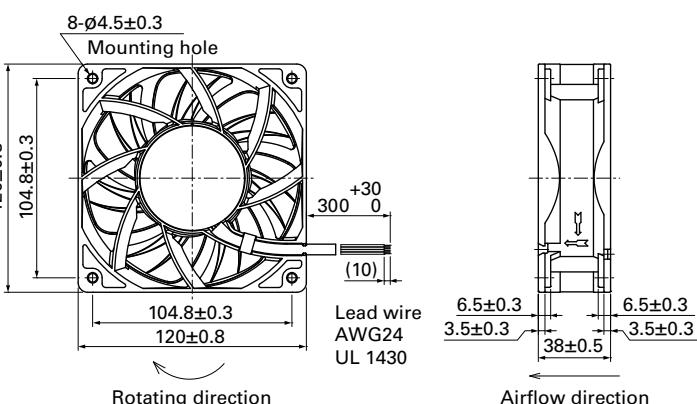

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side

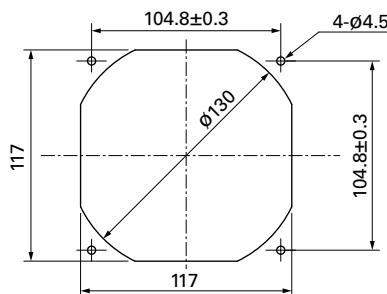

Options

Finger guards

page: p. 565

Model no.: 109-019E, 109-019K, 109-019C, 109-019H

Resin finger guards

page: p. 571

Model no.: 109-1000G

Resin filter kits

page: p. 572

Model no.: 109-1000F13 (13PPI), 109-1000F20 (20PPI),
109-1000F30 (30PPI), 109-1000F40 (40PPI)

Long Life Fan

120x120x38 mm

San Ace 120L 9GL type



General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire  Red  Black or Blue  Yellow
- Mass 370 g

Specifications

The models listed below have pulse sensors.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inch H₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
9GL1212G101	12	10.2 to 13.8	0.98	11.8	3600	3.88 137	135 0.542	49	-20 to +70	80000/60°C (115000/40°C)
9GL1212E101			0.61	7.32	3100	3.34 118	100 0.402	46		100000/60°C (135000/40°C)
9GL1212H101		0.38	4.56	2600	2.8	99 70.4	0.283	39		80000/60°C (115000/40°C)
9GL1212F101		0.28	3.36	2280	2.45	87 54.2	0.218	36		100000/60°C (135000/40°C)
9GL1212M101		0.21	2.52	1950	2.1	74 39.6	0.159	32		80000/60°C (115000/40°C)
9GL1224G101	24	20.4 to 27.6	0.5	12.0	3600	3.88 137	135 0.542	49	-20 to +70	100000/60°C (135000/40°C)
9GL1224E101			0.34	8.16	3100	3.34 118	100 0.402	46		80000/60°C (115000/40°C)
9GL1224H101		0.22	5.28	2600	2.8	99 70.4	0.283	39		100000/60°C (135000/40°C)
9GL1224F101		0.16	3.84	2280	2.45	87 54.2	0.218	36		80000/60°C (115000/40°C)
9GL1224M101		0.11	2.64	1950	2.1	74 39.6	0.159	32		100000/60°C (135000/40°C)
9GL1248G101	48	40.8 to 55.2	0.25	12.0	3600	3.88 137	135 0.542	49	-20 to +70	80000/60°C (115000/40°C)
9GL1248E101			0.17	8.16	3100	3.34 118	100 0.402	46		100000/60°C (135000/40°C)
9GL1248H101		0.11	5.28	2600	2.8	99 70.4	0.283	39		80000/60°C (115000/40°C)
9GL1248F101		0.09	4.32	2280	2.45	87 54.2	0.218	36		100000/60°C (135000/40°C)
9GL1248M101		0.07	3.36	1950	2.1	74 39.6	0.159	32		80000/60°C (115000/40°C)


Note 1: Sensor and control options are available for selection. Refer to the table on p. 610.

Note 2: The  mark indicates Short LeadTime Service applicable models. See p. 630 for details.

Airflow - Static Pressure Characteristics


9GL1212G101 With pulse sensor

Operating voltage range

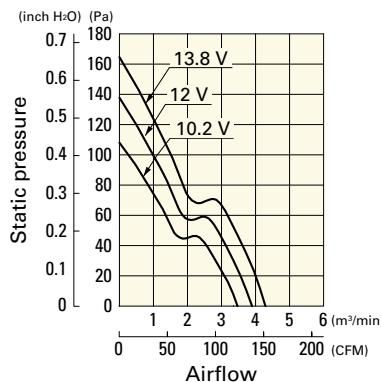


9GL1212E101 With pulse sensor

Operating voltage range

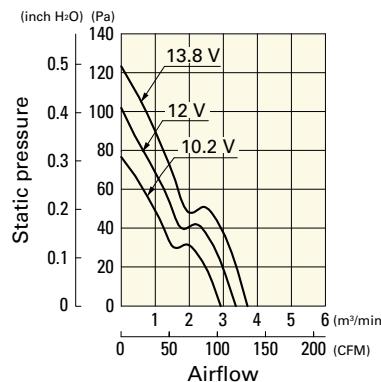


9GL1212H101 With pulse sensor

Operating voltage range

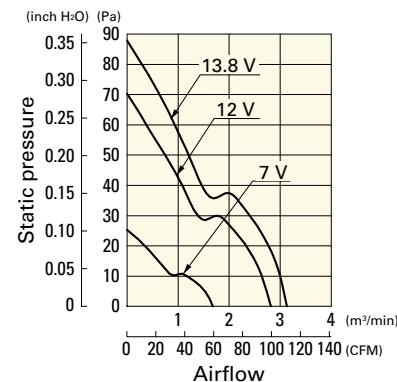


Airflow - Static Pressure Characteristics**9GL1212F101** With pulse sensor


Operating voltage range

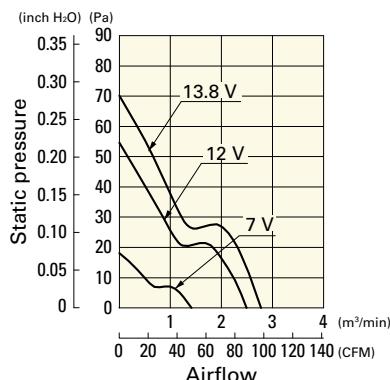**9GL1212M101** With pulse sensor


Operating voltage range

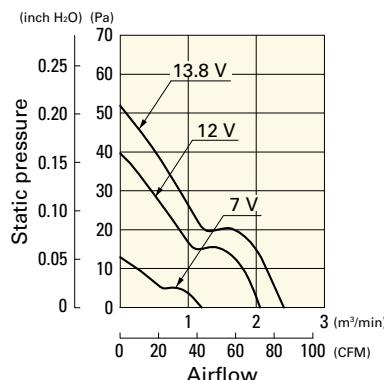**9GL1224G101** With pulse sensor


Operating voltage range

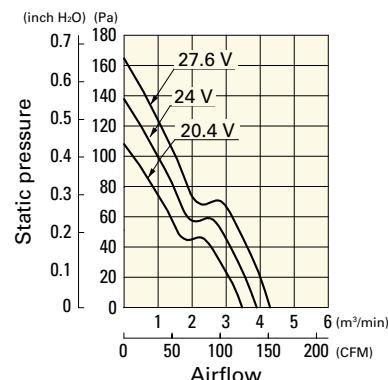**9GL1224E101** With pulse sensor


Operating voltage range

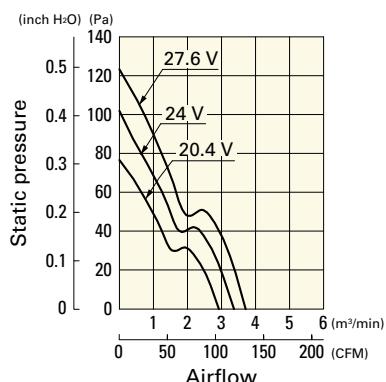**9GL1224H101** With pulse sensor


Operating voltage range

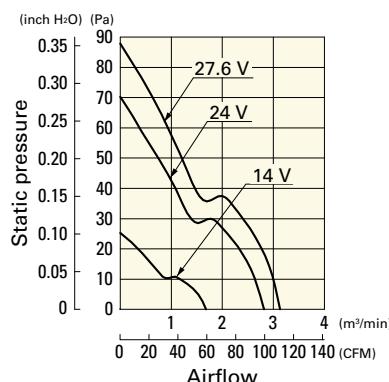**9GL1224F101** With pulse sensor


Operating voltage range

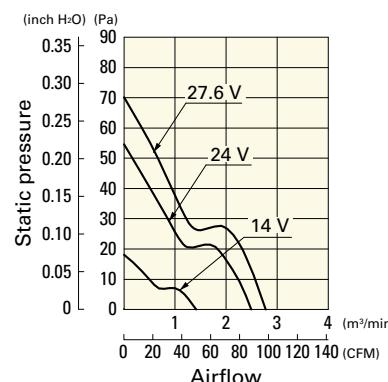**9GL1224M101** With pulse sensor


Operating voltage range

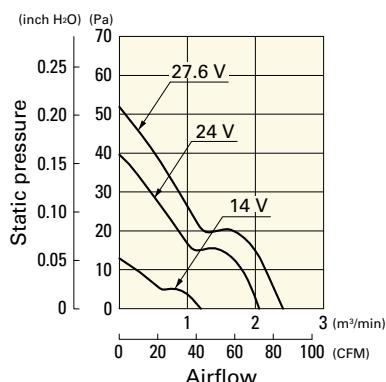**9GL1248G101** With pulse sensor


Operating voltage range

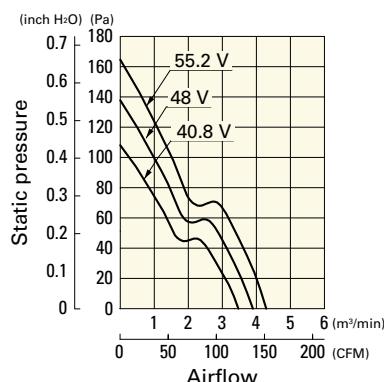**9GL1248E101** With pulse sensor


Operating voltage range

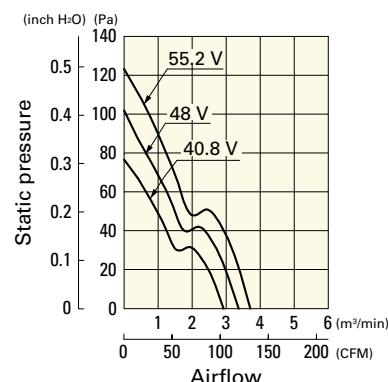**9GL1248H101** With pulse sensor


Operating voltage range

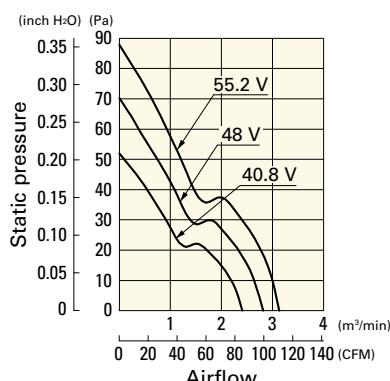**9GL1248F101** With pulse sensor


Operating voltage range

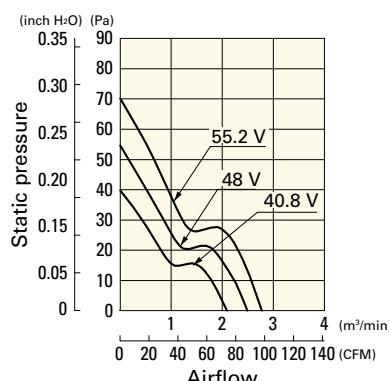**9GL1248M101** With pulse sensor


Operating voltage range

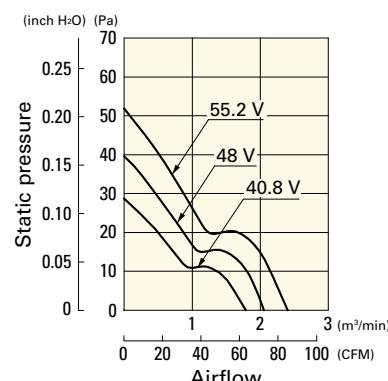

Dimensions (unit: mm)

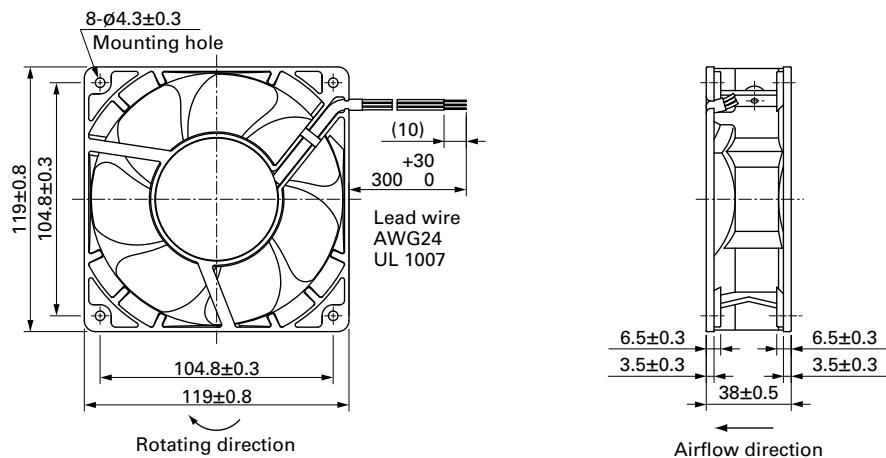

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

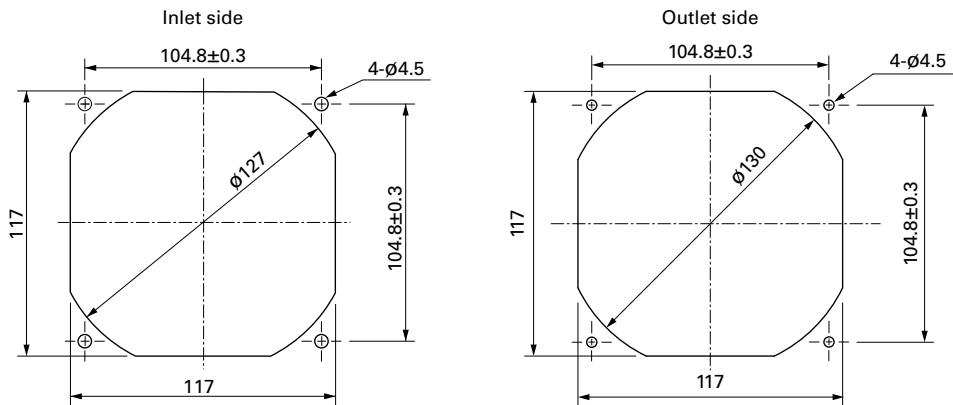

Options

Finger guards

page: p. 565

Model no.: 109-019E, 109-019K, 109-019C, 109-019H

Resin finger guards

page: p. 571

Model no.: 109-1000G

Resin filter kits

page: p. 572

Model no.: 109-1000F13 (13PPI), 109-1000F20 (20PPI),
109-1000F30 (30PPI), 109-1000F40 (40PPI)



140x140x38 mm

San Ace 140L 9LG type

General Specifications

- Material Frame: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire Red Black Yellow Brown
(For models without PWM control function, there is no speed control wiring.)
- Mass 640 g

Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
④ 9LG1412P1A001	12	10.2 to 13.8	100	3.72	44.64	6900	8.0 282	516 2.07	68	-20 to +70 180000/60°C (215000/40°C)	
④ 9LG1412P1H001			20	0.27	3.24	2300	2.66 93	80 0.32	39		
④ 9LG1412P1M001	24	20.4 to 27.6	100	1.7	20.4	5200	6.0 212	300 1.2	62		
④ 9LG1424P1A001			20	0.27	3.24	2300	2.66 93	80 0.32	39		
④ 9LG1424P1H001	48	40.8 to 55.2	100	0.85	20.4	5200	6.0 212	300 1.2	62		
④ 9LG1424P1M001			20	0.16	3.84	2300	2.66 93	80 0.32	39		
④ 9LG1448P1A001	12	10.2 to 13.8	100	0.92	44.16	6900	8.0 282	516 2.07	68		
④ 9LG1448P1H001			20	0.11	5.28	2300	2.66 93	80 0.32	39		
④ 9LG1448P1M001	24	20.4 to 27.6	100	0.42	20.16	5200	6.0 212	300 1.2	62		
④ 9LG1448P1M001			20	0.11	5.28	2300	2.66 93	80 0.32	39		

* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

The models listed below have pulse sensors.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
④ 9LG1412L1001	12	10.2 to 13.8	0.27	3.3	2300	2.6 91.9	80 0.32	39	-20 to +70 180000/60°C (215000/40°C)	
④ 9LG1424L1001			0.17	4.1	2300	2.6 91.9	80 0.32	39		
④ 9LG1448L1001			0.11	5.3	2300	2.6 91.9	80 0.32	39		


Note 1: Sensor and control options are available for selection. Refer to the table on p. 614.

Note 2: The ④ mark indicates Short LeadTime Service applicable models. See p. 630 for details.


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG1412P1A001 With pulse sensor with PWM control function


PWM duty cycle

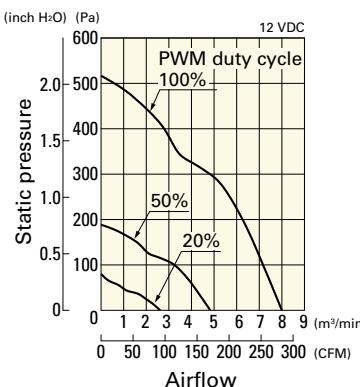

Operating voltage range

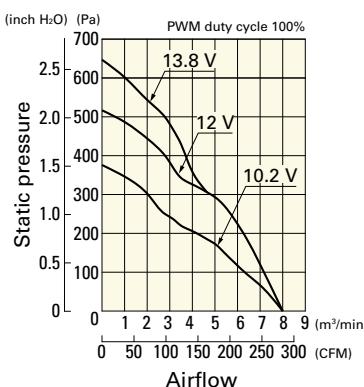


PWM duty - Speed characteristics example

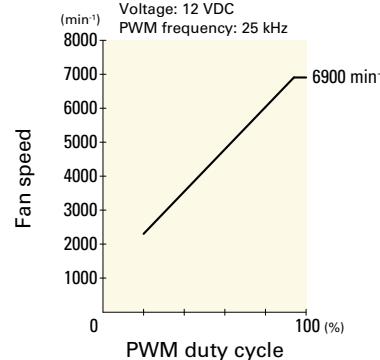


9LG1412P1H001 With pulse sensor with PWM control function


PWM duty cycle

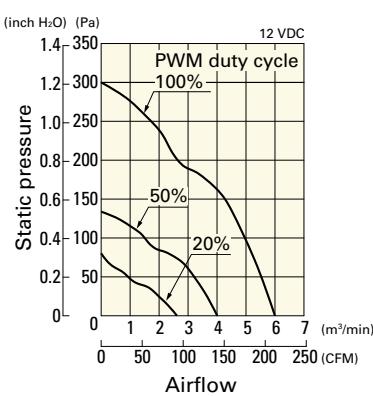

Operating voltage range

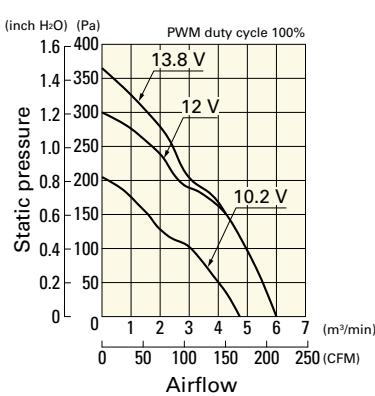


PWM duty - Speed characteristics example

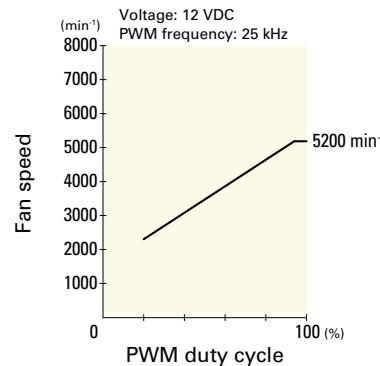


9LG1412P1M001 With pulse sensor with PWM control function


PWM duty cycle

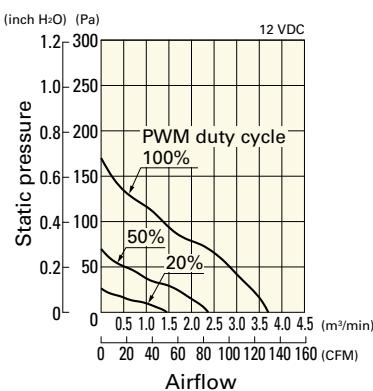

Operating voltage range

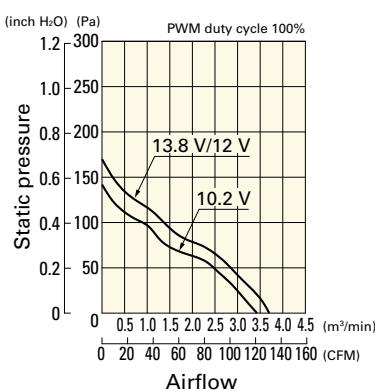


PWM duty - Speed characteristics example

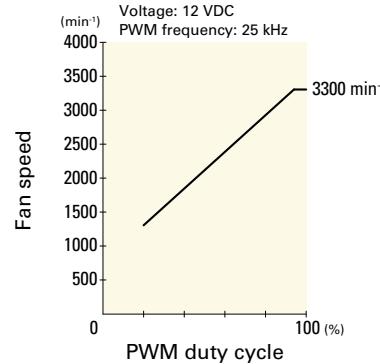


9LG1424P1A001 With pulse sensor with PWM control function


PWM duty cycle

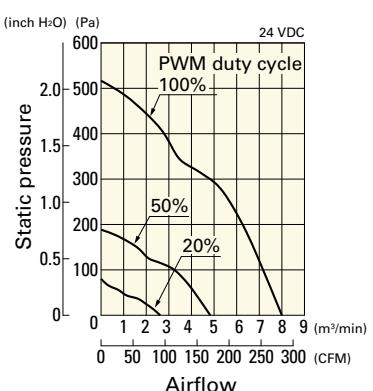

Operating voltage range

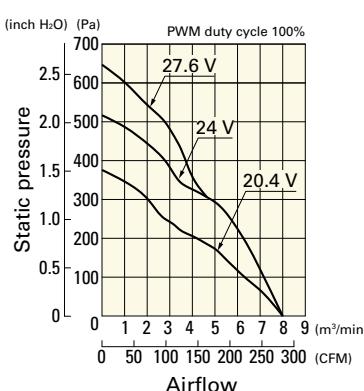


PWM duty - Speed characteristics example

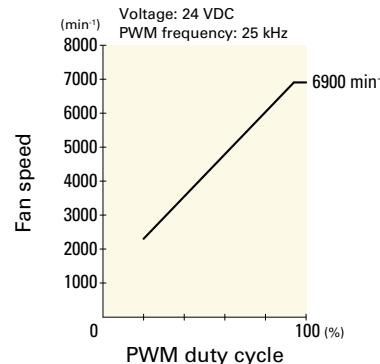


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG1424P1H001 With pulse sensor with PWM control function


PWM duty cycle

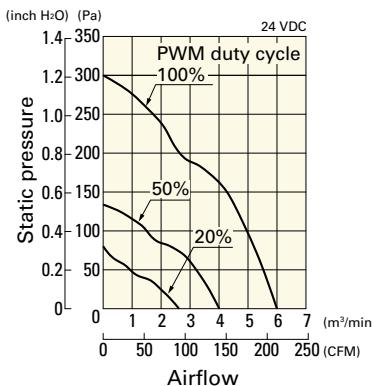

Operating voltage range

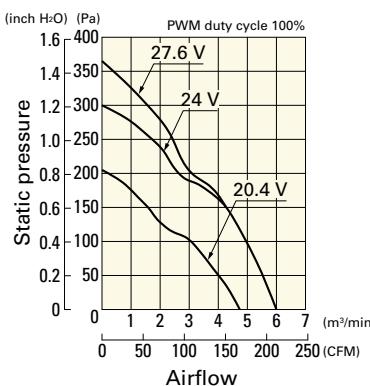


PWM duty - Speed characteristics example

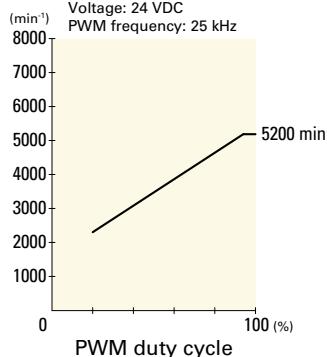


9LG1424P1M001 With pulse sensor with PWM control function


PWM duty cycle

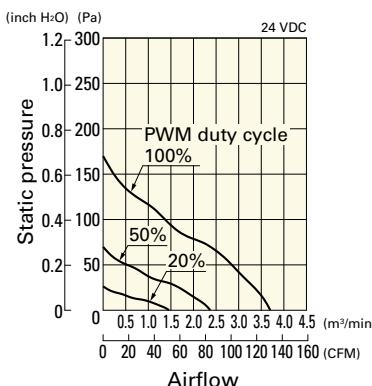

Operating voltage range

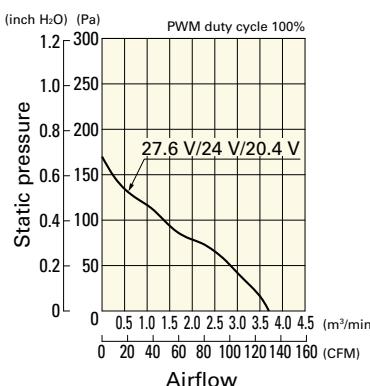


PWM duty - Speed characteristics example

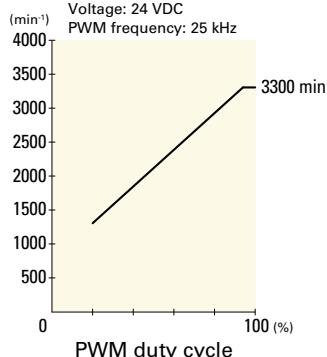


9LG1448P1A001 With pulse sensor with PWM control function


PWM duty cycle

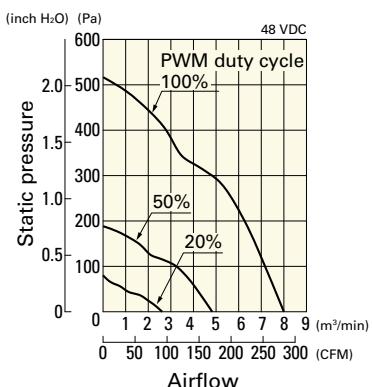

Operating voltage range

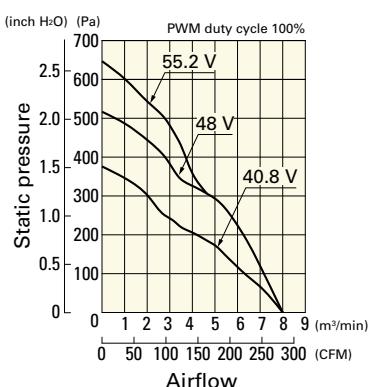


PWM duty - Speed characteristics example

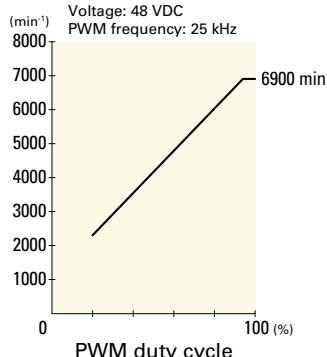


9LG1448P1H001 With pulse sensor with PWM control function


PWM duty cycle

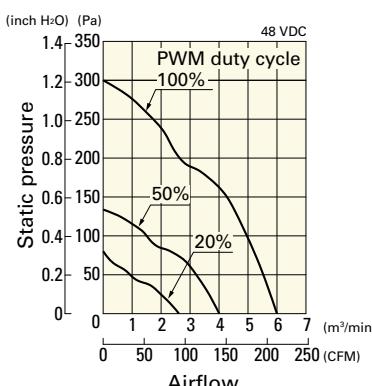

Operating voltage range

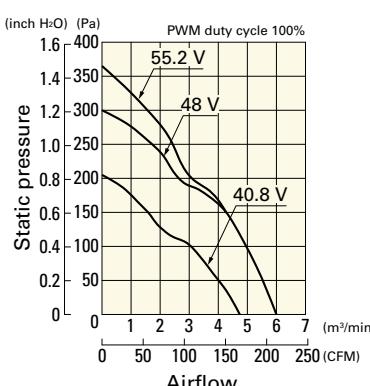


PWM duty - Speed characteristics example

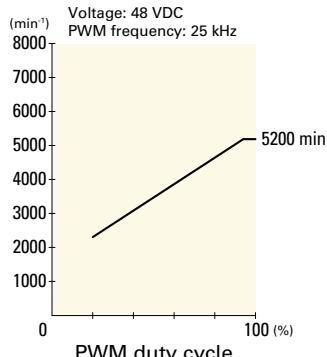


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG1448P1M001 With pulse sensor with PWM control function


PWM duty cycle

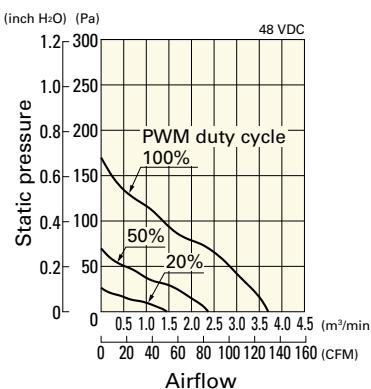

Operating voltage range

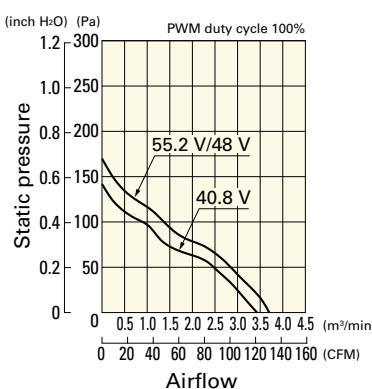


PWM duty - Speed characteristics example

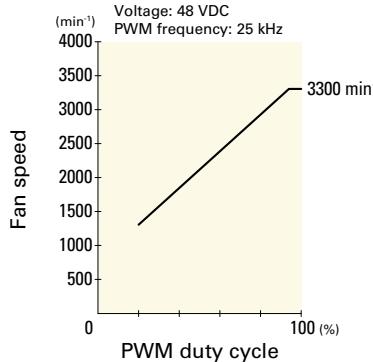

Airflow - Static Pressure Characteristics


9LG1412L1001 With pulse sensor

Operating voltage range

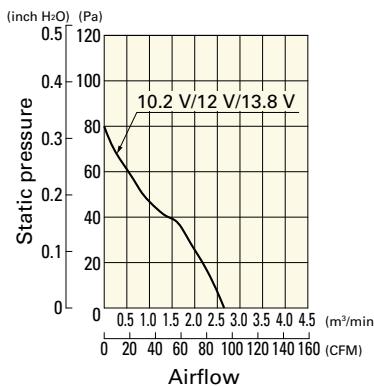


9LG1424L1001 With pulse sensor

Operating voltage range

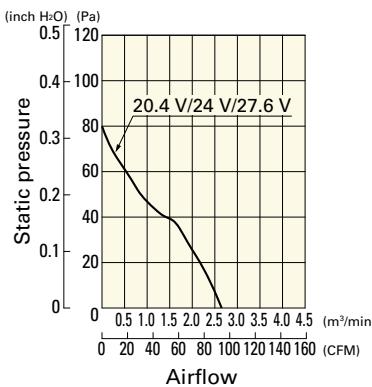


9LG1448L1001 With pulse sensor


Operating voltage range

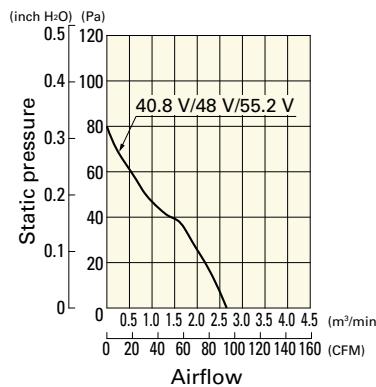

Dimensions (unit: mm) (With pulse sensor with PWM control function)

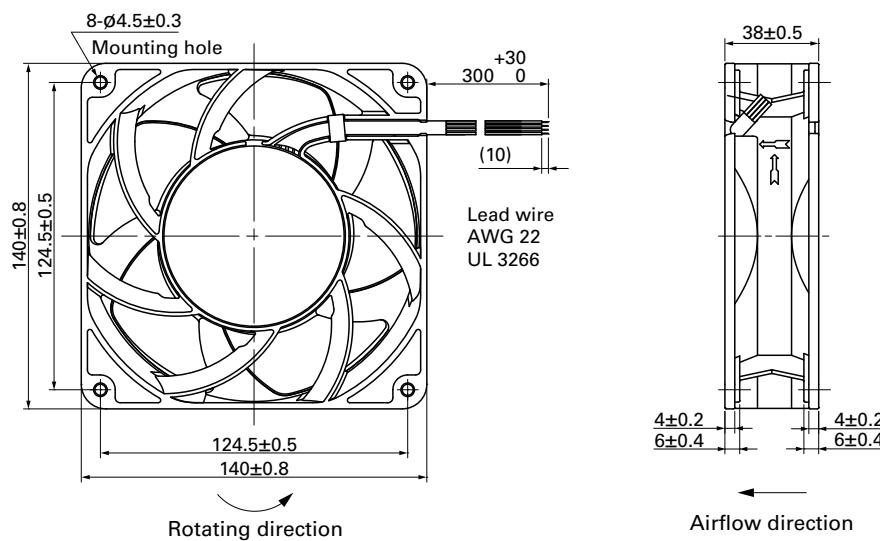

■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

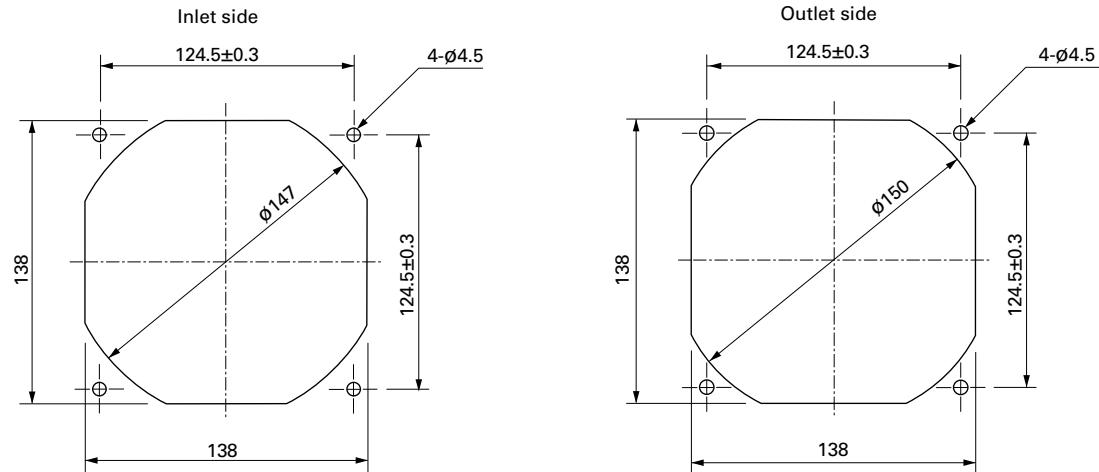

■ Options

Finger guards

page: p. 565

Model no.: 109-719, 109-719H



140x140x51 mm

San Ace 140L 9LG type 

General Specifications

- Material Frame: Aluminum (Black coating), Impeller: Plastic (Flammability: UL 94V-0)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire  Red  Black  Yellow  Brown
(For models without PWM control function, there is no speed control wiring.)
- Mass 790 g

Specifications

The models listed below have pulse sensors with PWM control function.

Model no.	Rated voltage [V]	Operating voltage range [V]	PWM duty cycle [%]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
 9LG1412P5G001	12	10.2 to 13.8	100	5.16	62	7500	9.0 318	655 2.63	69	-20 to +70	180000/60°C (215000/40°C)
			20	0.31	3.72	2300	2.75 97	80 0.32	38		
 9LG1412P5S001	24	20.4 to 27.6	100	1.83	22	5000	6.0 212	295 1.18	57	-20 to +70	180000/60°C (215000/40°C)
			20	0.31	3.72	2300	2.75 97	80 0.32	38		
 9LG1424P5G001	48	40.8 to 55.2	100	2.58	62	7500	9.0 318	655 2.63	69	-20 to +70	180000/60°C (215000/40°C)
			20	0.16	3.84	2300	2.75 97	80 0.32	38		
 9LG1424P5S001	24	20.4 to 27.6	100	0.91	22	5000	6.0 212	295 1.18	57	-20 to +70	180000/60°C (215000/40°C)
			20	0.16	3.84	2300	2.75 97	80 0.32	38		
 9LG1448P5G001	48	40.8 to 55.2	100	1.29	62	7500	9.0 318	655 2.63	69	-20 to +70	180000/60°C (215000/40°C)
			20	0.12	5.76	2300	2.75 97	80 0.32	38		
 9LG1448P5S001	48	40.8 to 55.2	100	0.45	22	5000	6.0 212	295 1.18	57	-20 to +70	180000/60°C (215000/40°C)
			20	0.12	5.76	2300	2.75 97	80 0.32	38		

* PWM frequency is 25 kHz. Models without ratings for 0% PWM duty cycle have zero speed at 0%. When control terminal is open, speed is the same as at 100% duty cycle.

The models listed below have pulse sensors.

Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
 9LG1412A5001	12	10.2 to 13.8	2.61	31.4	5700	6.9 243.8	500 2	61	-20 to +70	180000/60°C (215000/40°C)
			1	12	4100	4.9 173.1	260 1.04	52		
			0.43	5.16	2600	3.1 109.5	100 0.4	40		
 9LG1424A5001	24	20.4 to 27.6	1.21	29.1	5700	6.9 243.8	540 2.17	61	-20 to +70	180000/60°C (215000/40°C)
			0.55	13.2	4100	4.9 173.1	260 1.04	52		
			0.23	5.52	2600	3.1 109.5	100 0.4	40		
 9LG1448A5001	48	40.8 to 55.2	0.66	31.7	5700	6.9 243.8	540 2.17	61	-20 to +70	180000/60°C (215000/40°C)
			0.31	14.9	4100	4.9 173.1	260 1.04	52		
			0.15	7.2	2600	3.1 109.5	100 0.4	40		


Note 1: Sensor and control options are available for selection. Refer to the table on p. 614.

Note 2: The  mark indicates Short LeadTime Service applicable models. See p. 630 for details.


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG1412P5G001 With pulse sensor with PWM control function


PWM duty cycle

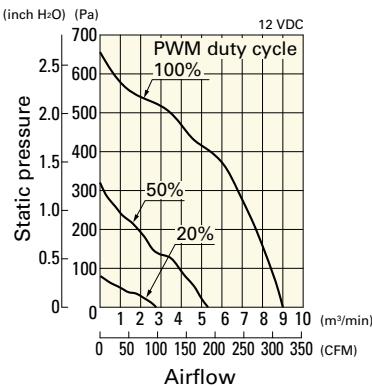

Operating voltage range

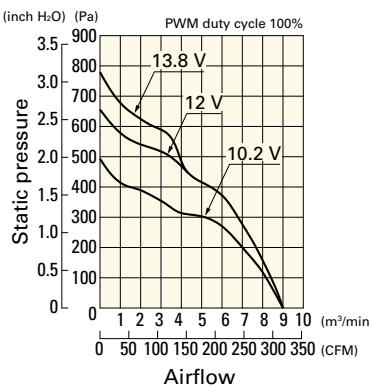


PWM duty - Speed characteristics example

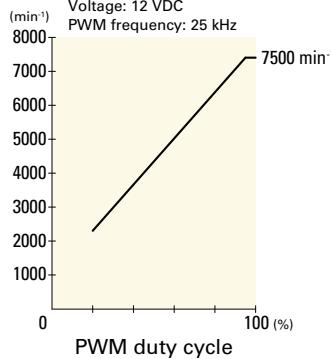


9LG1412P5S001 With pulse sensor with PWM control function


PWM duty cycle

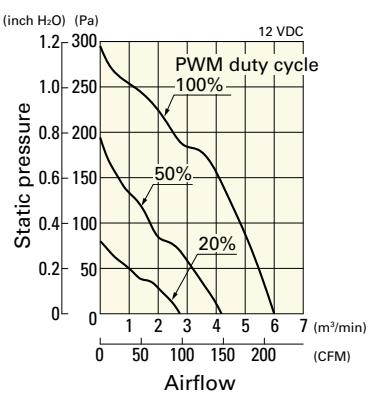

Operating voltage range

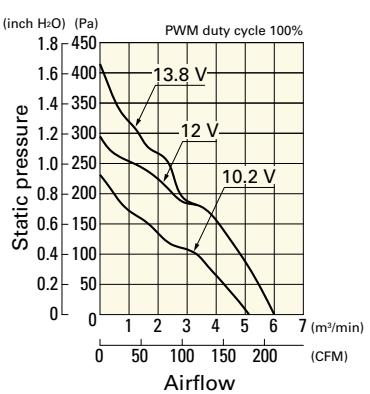


PWM duty - Speed characteristics example

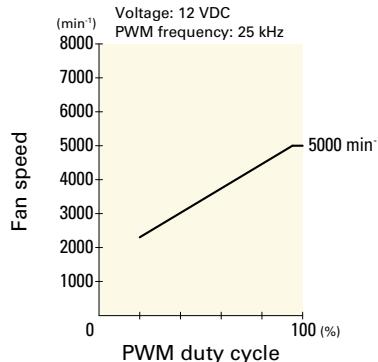


9LG1424P5G001 With pulse sensor with PWM control function


PWM duty cycle

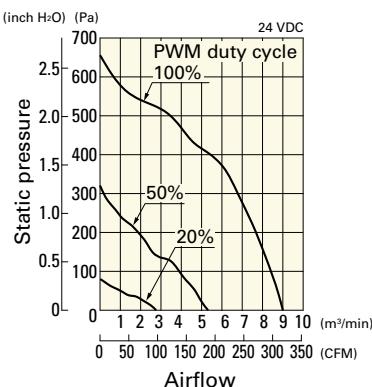

Operating voltage range

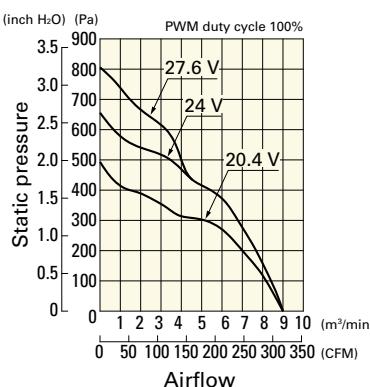


PWM duty - Speed characteristics example

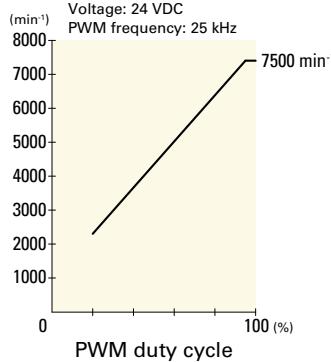


9LG1424P5S001 With pulse sensor with PWM control function


PWM duty cycle

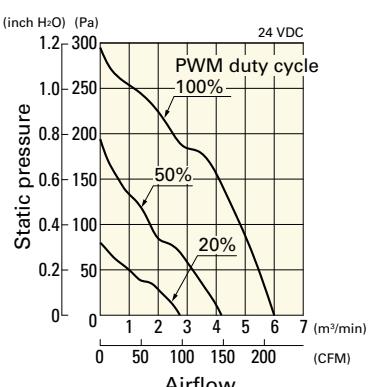

Operating voltage range

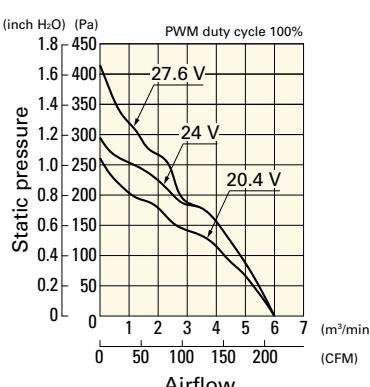


PWM duty - Speed characteristics example

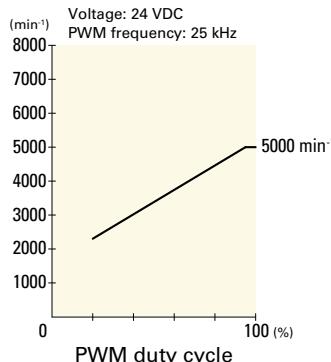


Airflow - Static Pressure Characteristics / PWM Duty - Speed Characteristics Example

9LG1448P5G001 With pulse sensor with PWM control function


PWM duty cycle

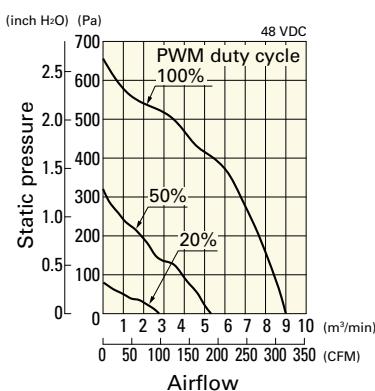

Operating voltage range

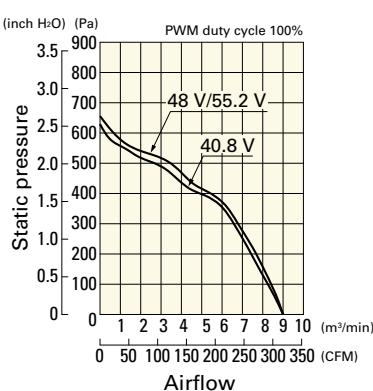


PWM duty - Speed characteristics example

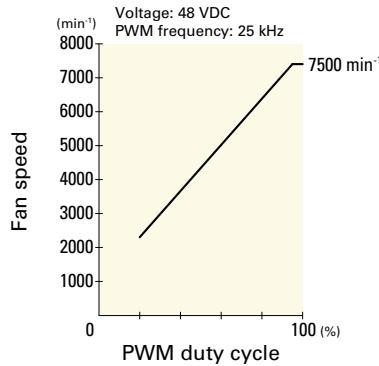


9LG1448P5S001 With pulse sensor with PWM control function


PWM duty cycle

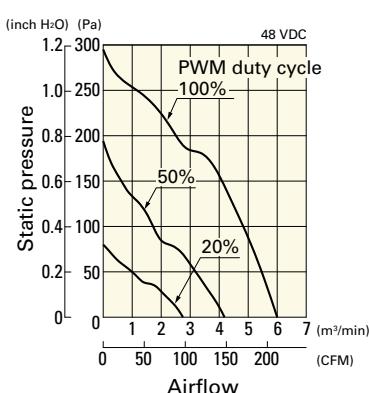

Operating voltage range

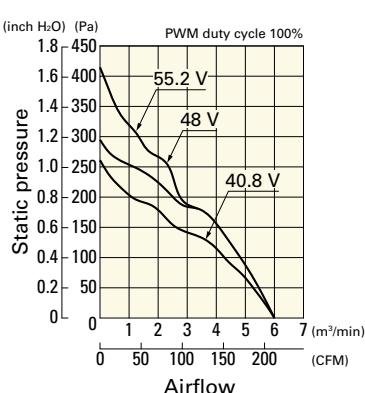


PWM duty - Speed characteristics example

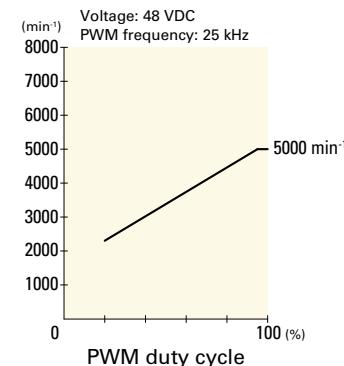


Airflow - Static Pressure Characteristics

9LG1412A5001 With pulse sensor

Operating voltage range

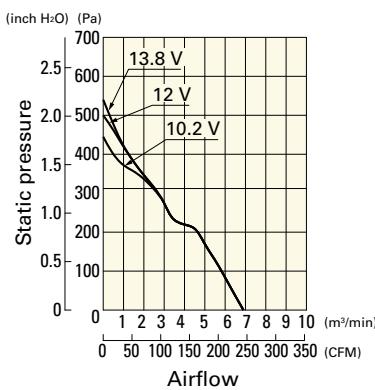


Operating voltage range

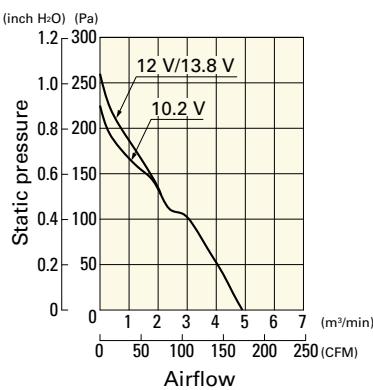

9LG1412M5001 With pulse sensor


Operating voltage range

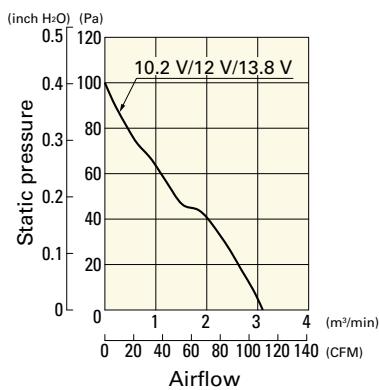

Airflow - Static Pressure Characteristics


9LG1424A5001 With pulse sensor

Operating voltage range

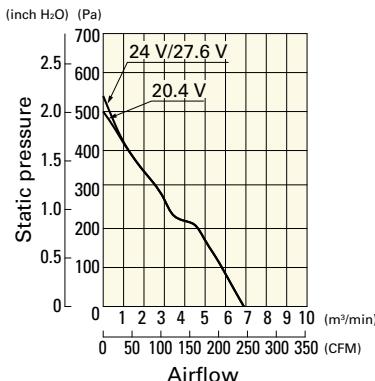


9LG1424H5001 With pulse sensor

Operating voltage range

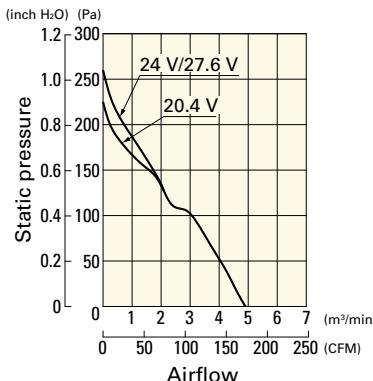


9LG1424M5001 With pulse sensor

Operating voltage range

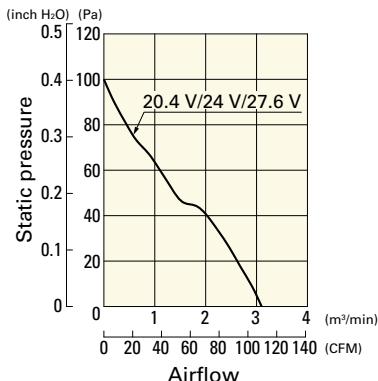


9LG1448A5001 With pulse sensor

Operating voltage range

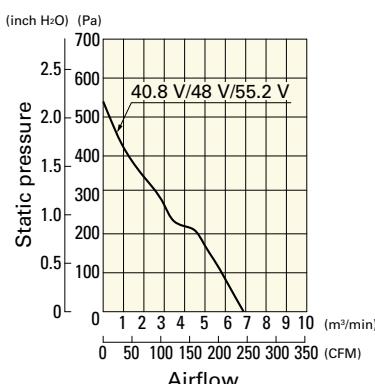


9LG1448H5001 With pulse sensor

Operating voltage range

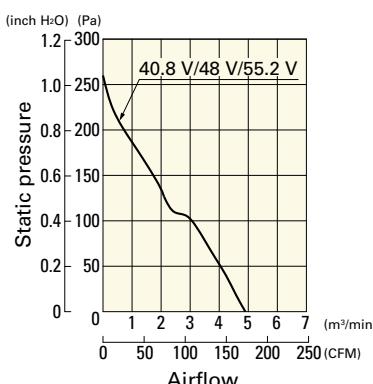

9LG1448M5001 With pulse sensor


Operating voltage range

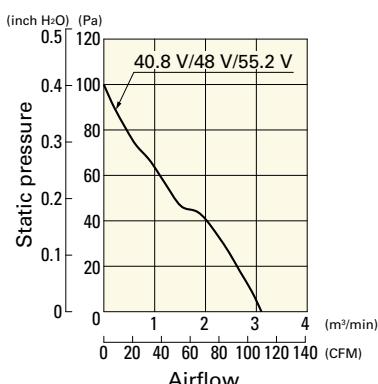


DC

Long Life Fan 140 mm sq.

Dimensions (unit: mm) (With pulse sensor with PWM control function)

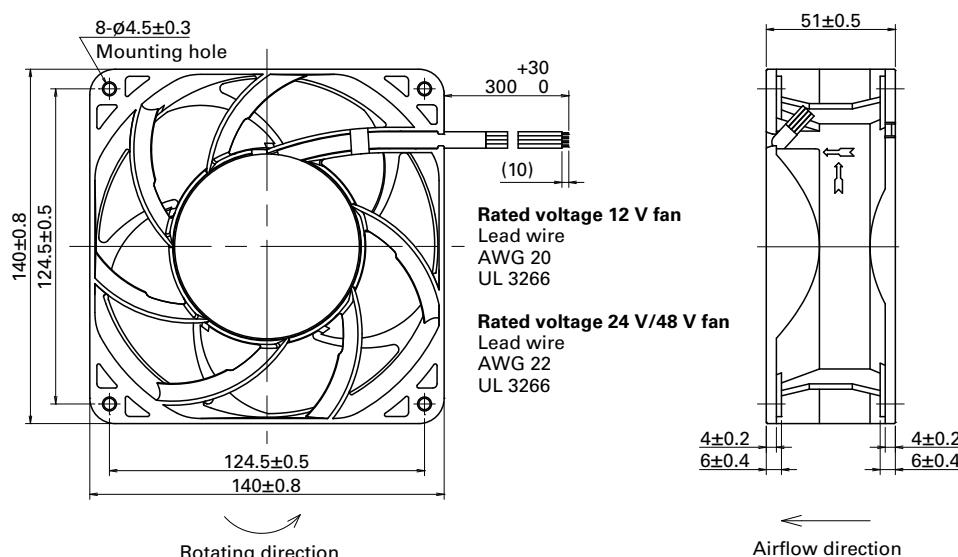

■ Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

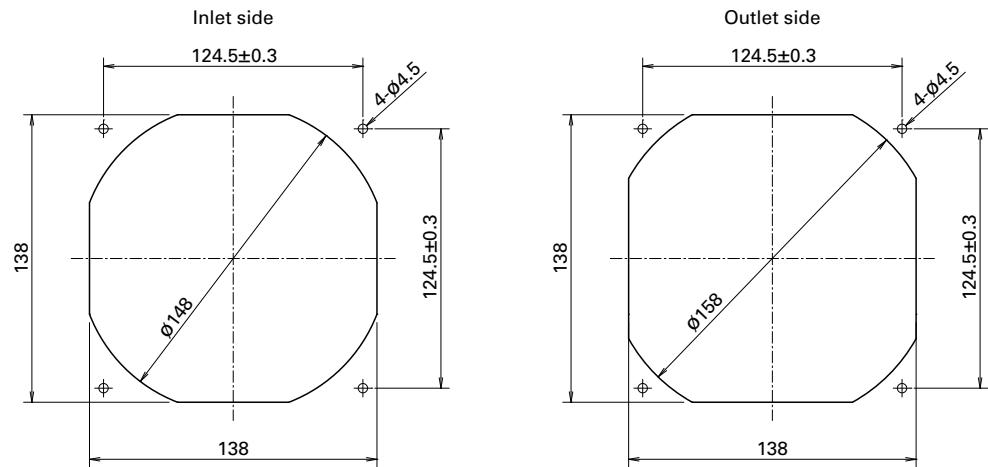

■ Options

Finger guards

page: p. 565

Model no.: 109-719, 109-719H

DC

Long Life Fan 140 mm sq.

Ø172x150x51 mm

San Ace 172L 9L_{type}

Sidecut type



DC

Long Life Fan Ø172 mm

General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire ⊕Red ⊖Black or Blue (Sensor) Yellow
- Mass 760 g

Specifications

The models listed below have pulse sensors.


Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min ⁻¹]	Max. airflow [m ³ /min] [CFM]	Max. static pressure [Pa] [inchH ₂ O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
109L5712H501	12	10.2 to 13.8	1.2	14.4	3050	6.4 226	137.2 0.551	52	-20 to +70	100000/60°C (135000/40°C)
109L5712M501			0.48	5.76	2000	4.2 148	67.6 0.271	41		
109L5724H501	24	20.4 to 27.6	0.58	13.92	3050	6.4 226	137.2 0.551	52		
109L5724M501			0.2	4.8	2000	4.2 148	67.6 0.271	41		
109L5748H501	48	40.8 to 55.2	0.28	13.44	3050	6.4 226	137.2 0.551	52		
109L5748M501			0.11	5.28	2000	4.2 148	67.6 0.271	41		

Note: Sensor and control options are available for selection. Refer to the table on p. 603.

Airflow - Static Pressure Characteristics


109L5712H501 With pulse sensor

Operating voltage range

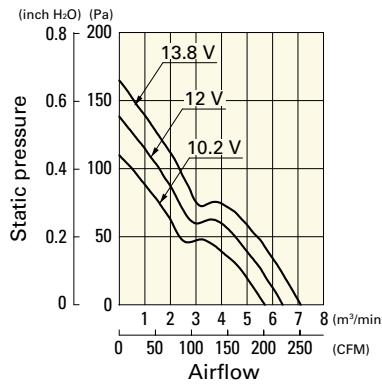


109L5712M501 With pulse sensor

Operating voltage range

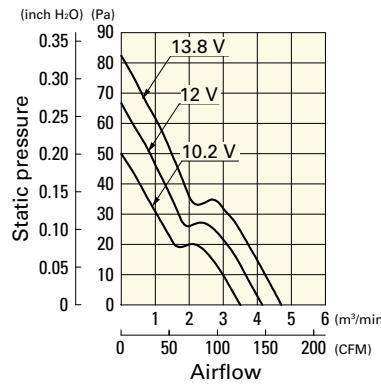

109L5724H501 With pulse sensor


Operating voltage range

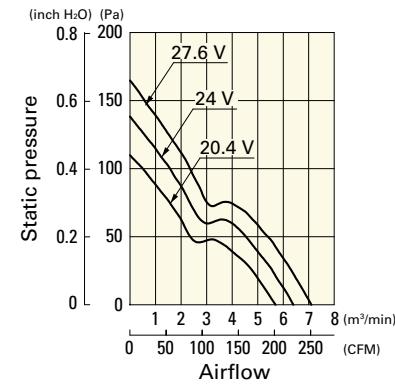

Airflow - Static Pressure Characteristics


109L5724M501 With pulse sensor

Operating voltage range

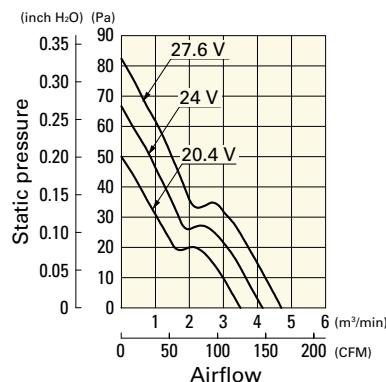


109L5748H501 With pulse sensor

Operating voltage range


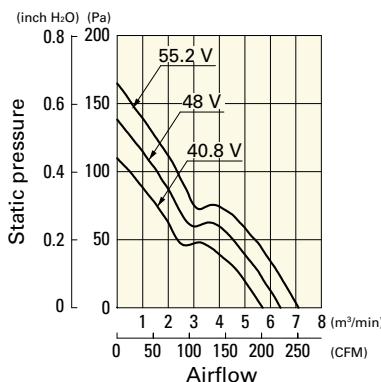


109L5748M501 With pulse sensor

Operating voltage range

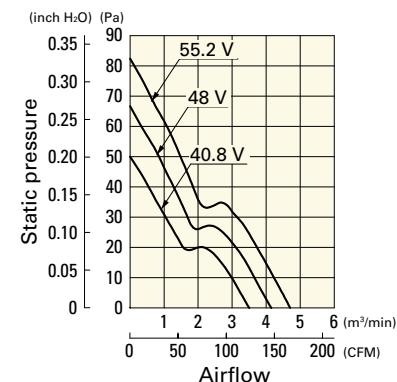

Dimensions (unit: mm)

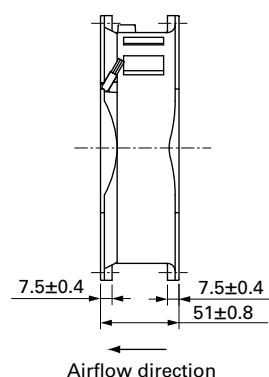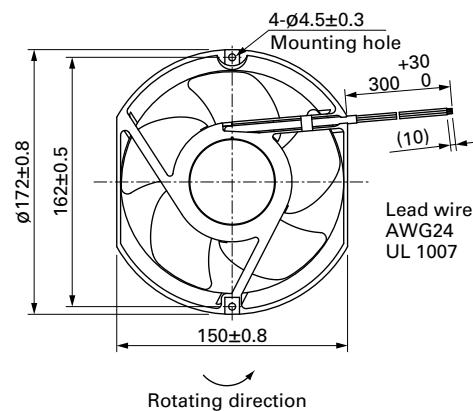


DC

Long Life Fan ø172 mm

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side

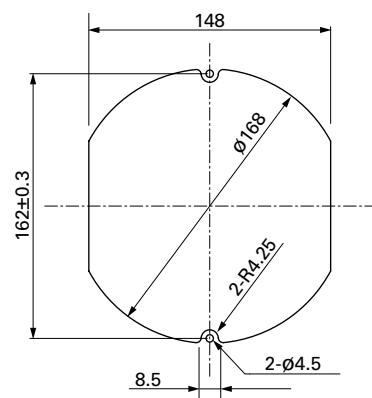

Options

Finger guards

page: p. 566

Model no.: 109-319E, 109-319H, 109-320

Ø172x51 mm

San Ace 172L 9L type   

Round type



DC

Long Life Fan Ø172 mm

General Specifications

- Material Frame: Aluminum, Impeller: Plastic (Flammability: UL 94V-1)
- Expected life See the table below. (L10 life: 90% survival rate for continuous operation in free air at 60°C, rated voltage) Expected life at 40°C is for reference only.
- Motor protection function Locked rotor burnout protection, Reverse polarity protection
For details, please refer to p. 580.
- Dielectric strength 50/60 Hz, 500 VAC, for 1 minute (between lead wire conductors and frame)
- Insulation resistance 10 MΩ min. at 500 VDC (between lead wire conductors and frame)
- Sound pressure level (SPL) A-weighted sound pressure level (SPL) at 1 m away from the air inlet.
- Storage temperature -30 to +70°C (Non-condensing)
- Lead wire  Red  Black or Blue  Sensor Yellow
- Mass 780 g

Specifications

The models listed below have pulse sensors.


Model no.	Rated voltage [V]	Operating voltage range [V]	Rated current [A]	Rated input [W]	Rated speed [min⁻¹]	Max. airflow [m³/min] [CFM]	Max. static pressure [Pa] [inchH₂O]	SPL [dB (A)]	Operating temperature [°C]	Expected life [h]
109L1712H501	12	10.2 to 13.8	1.2	14.4	3050	6.4 226	137.2 0.551	47	-20 to +70	100000/60°C (135000/40°C)
109L1712M501			0.48	5.76	2000	4.2 148	67.6 0.271	36		
109L1724H501	24	20.4 to 27.6	0.58	13.92	3050	6.4 226	137.2 0.551	47	-20 to +70	100000/60°C (135000/40°C)
109L1724M501			0.2	4.8	2000	4.2 148	67.6 0.271	36		
109L1748H501	48	40.8 to 55.2	0.28	13.44	3050	6.4 226	137.2 0.551	47	-20 to +70	100000/60°C (135000/40°C)
109L1748M501			0.11	5.28	2000	4.2 148	67.6 0.271	36		

Note: Sensor and control options are available for selection. Refer to the table on p. 603.

Airflow - Static Pressure Characteristics


109L1712H501 With pulse sensor

Operating voltage range

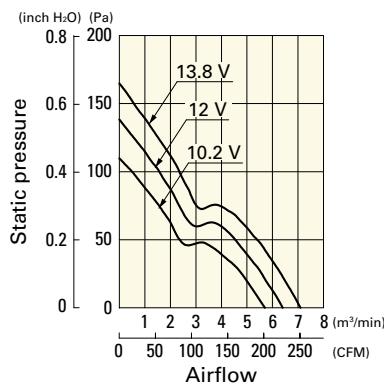


109L1712M501 With pulse sensor

Operating voltage range

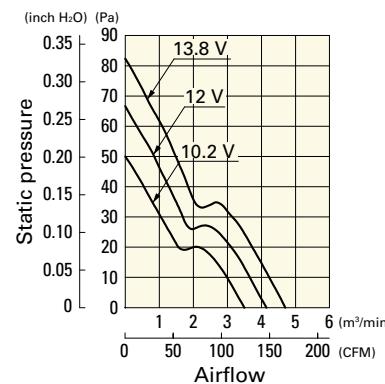

109L1724H501 With pulse sensor


Operating voltage range

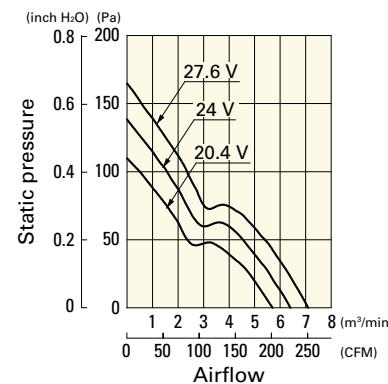

Airflow - Static Pressure Characteristics


109L1724M501 With pulse sensor

Operating voltage range

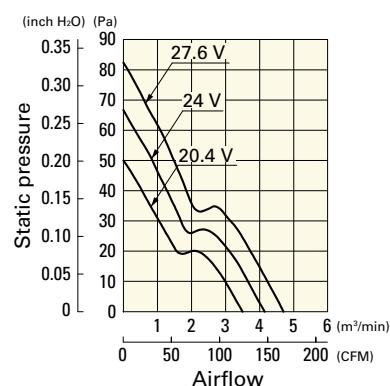


109L1748H501 With pulse sensor

Operating voltage range

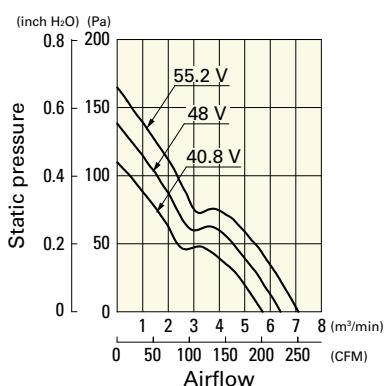


109L1748M501 With pulse sensor

Operating voltage range

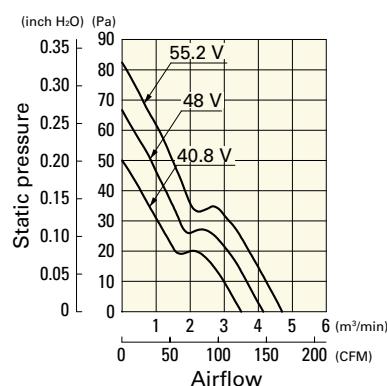

Dimensions (unit: mm)

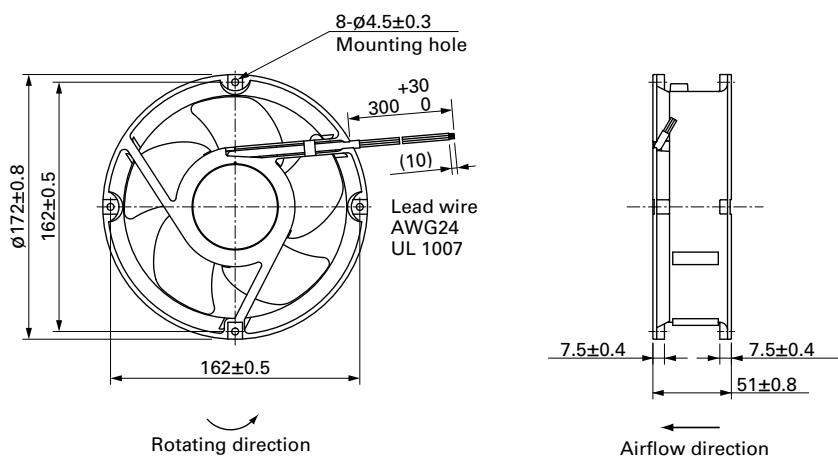


DC

Long Life Fan ø172 mm

Reference Dimensions of Mounting Holes and Vent Opening (unit: mm)

Inlet side, Outlet side

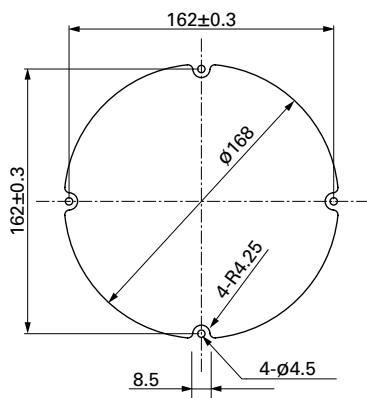

Options

Finger guards

page: p. 566

Model no.: 109-319E, 109-319H, 109-320, 109-1066, 109-1068